




FRAX MB POLE 93014

26020 9310 N

AVAILABLE IN  
ANTHRACITE 26020 9310 N

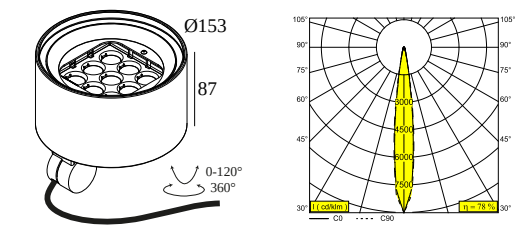

 [View on website](#)



| General info                         |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| LOCATION                             | outdoor                                                                                  |
| INSTALLATION                         | Pole Pole top                                                                            |
| INGRESS PROTECTION                   | IP65                                                                                     |
| PROTECTION AGAINST MECHANICAL IMPACT | IK08                                                                                     |
| WEIGHT (KG)                          | 2.3                                                                                      |
| ADJUSTABILITY                        | 0° to 120° swiveling, 360° rotatable                                                     |
| INFORMATION                          | 9 x LENS SP-14°<br>INCL.LED POWER SUPPLY 900mA-DC<br>INCL.1 x CABLE H05 RN-F 3 x 1mm² 6m |

| Electrical info |                    |
|-----------------|--------------------|
| ELECTRICAL      | 220-240V / 50-60Hz |
| CLASS           | I                  |
| POWER SUPPLY    | YES                |
| DIM TYPE        | non-dimmable       |
| ENERGY CLASS    | F                  |
| CERTIFICATES    | CB, ENEC, EPD, RCM |

| Lightsource info            |                                                      |
|-----------------------------|------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                  |
| LIGHTSOURCE                 | LED cluster 23,4W / CRI>90 (R9: 60) / 3000K / 2654lm |
| TM-30 VALUES                | Rf: 92 / Rg: 99                                      |
| SDCM                        | SDCM3                                                |
| RISKGROUP                   | RG2                                                  |
| LM80                        | L80 > 150000                                         |
| BEAMANGLE                   | 14°                                                  |
| LED TECHNICS (LIGHT SOURCE) | 2654lm // 23,4W // 113lm/W                           |
| LED TECHNICS (LUMINAIRE)    | 2070lm // 26,9W // 77lm/W                            |

| Requirements |  |
|--------------|--|
| FRAX BRACKET |  |


| Options                 |  |
|-------------------------|--|
| FRAX ANTI VANDAL SCREWS |  |

| Accessories |  |
|-------------|--|
| FRAX M KAP  |  |

For detailed installation instructions, please consult the manual : [26020\\_XXX0\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION

#### Light altering devices




**26070 0020 N** FRAX M KAP N

☐


#### Other



**26070 0030** FRAX ANTI VANDAL SCREWS 5 PCS

☐

**26071 0050 N** FRAX POLE 60 BRACKET N

☐

**26071 0060 N** FRAX POLE 80 BRACKET N

☐

Notes: