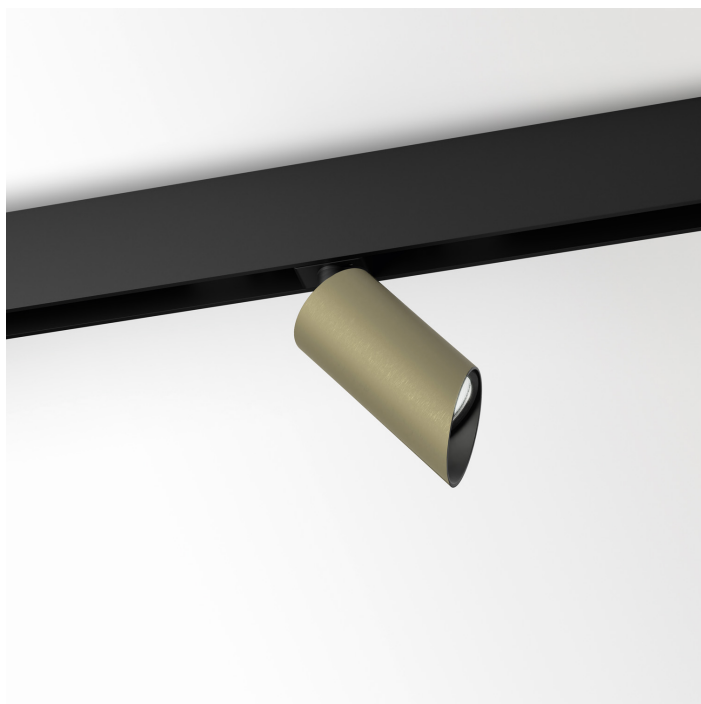




M20/M26H - SPY 52 WALLWASH SOFT 930 DIM5

19895 9005 GC

AVAILABLE IN



BLACK 19895 9005 B

FLEMISH BRONZE 19895 9005 FBR

FLEMISH GOLD 19895 9005 FG

GOLD COLOURED 19895 9005 GC

WHITE 19895 9005 W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	WALLWASH LENS EXCL LED POWER SUPPLY 48V-DC

Electrical info

ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, EPD

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	490lm // 11,7W // 42lm/W

Remarks

Take a look at our [MAGNETIC PROFILES movie](#)

Requirements





LED POWER SUPPLY 48V-DC

For detailed installation instructions, please consult the manual : [19895_XXX5_HAND.pdf](#)


M20/M26H - SPY 52 WALLWASH SOFT 930 DIM5

19895 9005 GC

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable		8
 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable		20
 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40		8
 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40		17




COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL	Available Colours
 30411 9205 SHIFTLINE M26H + SBL 2m DIM5	
 30411 9305 SHIFTLINE M26H + SBL 2m DIM5	
 30412 9205 SHIFTLINE M26H + SBL 3m DIM5	

DELTALIGHT





M20/M26H - SPY 52 WALLWASH SOFT 930 DIM5

19895 9005 GC

	30412 9305 SHIFTLINE M26H + SBL 3m DIM5	 
	30413 9205 SHIFTLINE M26H + SBL 4m DIM5	 
	30413 9305 SHIFTLINE M26H + SBL 4m DIM5	 

SHIFTLINE M26H profile

Available Colours

	23359 0000 SLM26H - PROFILE	 
	23359 0010 SLM26H - PROFILE 1m	 
	23359 0020 SLM26H - PROFILE 2m	         
	23359 0030 SLM26H - PROFILE 3m	         

SPLITLINE M20 ST profile

Available Colours

	23397 0000 SPM20 ST - PROFILE	 
	23397 0020 SPM20 ST - PROFILE 2m	 

DELTALIGHT





M20/M26H - SPY 52 WALLWASH SOFT 930 DIM5

19895 9005 GC

	23397 0030 SPM20 ST - PROFILE 3m	 
---	---	---

SPLITLINE M20 profile

Available Colours

	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: