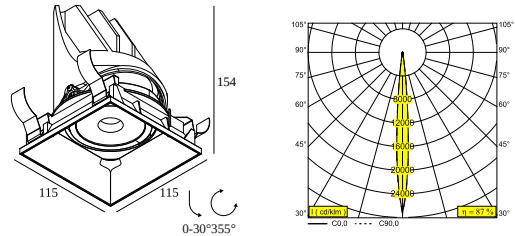




ENTERO SQ-L TRIMLESS 92710

28534 9210 B

AVAILABLE IN
BLACK 28534 9210 B
FULL WHITE 28534 9210 FW
GOLD COLOURED 28534 9210 GC



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - Ø KIT
RECESSED DEPTH (MM)	165
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.745
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS SP-10° EXCL.LED POWER SUPPLY 350-900mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-10,7W / CRI>90 (R9: 56) / 2700K / 385-814lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	10°
LED TECHNICS (LIGHT SOURCE)	814lm // 10,7W // 76lm/W
LED TECHNICS (LUMINAIRE)	709lm // 12,3W // 58lm/W

Requirements	
MOUNTING KIT ENTERO SQUARE L	
LED POWER SUPPLY 350 / 500 / 700 / 900mA-DC DIM (Remote)	

Accessories	
ENTERO L HONEYCOMB	

For detailed installation instructions, please consult the manual : [28534_XXX0_HAND.pdf](#)

DELTALIGHT

ENTERO SQ-L TRIMLESS 92710

28534 9210 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 28400 0060 - MOUNTING KIT ENTERO SQ-L Required
 Plasterboard	 28400 0060 - MOUNTING KIT ENTERO SQ-L Required
 Stucanet	 28400 0060 - MOUNTING KIT ENTERO SQ-L Required
 Wood	 28400 0060 - MOUNTING KIT ENTERO SQ-L Required
 Concrete + plaster	 28400 0060 - MOUNTING KIT ENTERO SQ-L Required
 Lintel + plaster	 28400 0060 - MOUNTING KIT ENTERO SQ-L Required
 Hollow-core slab + plaster	 28400 0060 - MOUNTING KIT ENTERO SQ-L Required
 Stretched ceiling	 28400 0120 - MOUNTING KIT ENTERO SQ-L CSC Required
	 28400 0180 - MOUNTING KIT ENTERO SQ-L WSC Required


FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'I' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

3









Dimtype: non-dimmable

Cutout dimension (mm): 30

DELTALIGHT











ENTERO SQ-L TRIMLESS 92710

28534 9210 B

	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	3	☐
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	3	☐
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 45	3	☐
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	3	☐
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	3	☐
	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	3	☐
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 Dimtype: DALI Cutout dimension (mm): 45	3	☐
	300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	3	☐
	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	3	☐
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	3 3 3	☐











ENTERO SQ-L TRIMLESS 92710

28534 9210 B

	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	6(6) 6(6) 6(4) 5(3)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	2->4(3) 4(2) 3(1) 1(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	3 3	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	4(3) 4(2) 3(1) -	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->9(10) 9(6) 7(4) -	☐
	300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 42	2->2	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	2->4(3) 3(2) 2(1) 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	4(3) 3(2) 2(1) -	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	5->7 4->7 4->6 3->6 3->6	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2->3 3 3 -	☐

ENTERO SQ-L TRIMLESS 92710




28534 9210 B

	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	4 4 4 -	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4 4 4 -	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	6(6) 5(5) 5(4) 5(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	4 4 4 3	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	3->3	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->2 2->2	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	3->4 3->4	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	3 3 2 1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	4(3)	☐


DELTALIGHT

ENTERO SQ-L TRIMLESS 92710


28534 9210 B

	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	3(1)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	4(2)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	3	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	3	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	3	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Mounting kits

	28400 0060 MOUNTING KIT ENTERO SQ-L	☐
Cutout dimension (mm): 142 x 142		

Mounting kits stretched ceiling


	28400 0120 MOUNTING KIT ENTERO SQ-L CSC	☐
	28400 0180 MOUNTING KIT ENTERO SQ-L WSC	☐

DELTALIGHT

ENTERO SQ-L TRIMLESS 92710

28534 9210 B

Light altering devices



28500 0170 B ENTERO L HONEYCOMB SINGLE USE B



Notes: