

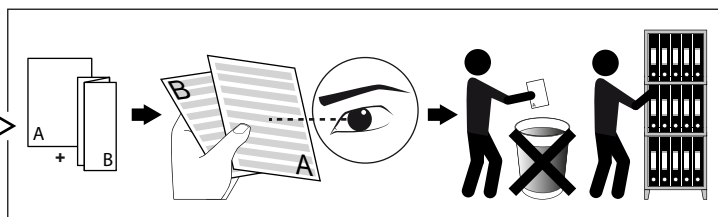



DEEL
PARTIE
TEIL
PART
PARTE
PARTE

A

WINDOW 6060

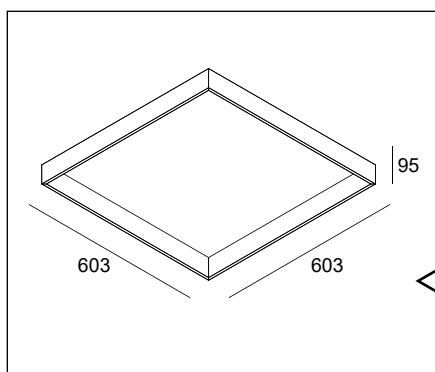

OPTIONS SUSPENDED FIXATION

Suspension set 26 3m	328 26 43
Suspension set 26 3m ED	328 26 43 ED
Cable Base R	203 99 55
Cable Base S	203 99 56
Coverset R 100	204 00 100
Coverset R 90	204 00 90
Coverset R 62	204 00 62
Coverset S 62	204 62 62
Coverset S 80	204 80 80
Coverset S 90	204 90 90

REQUIREMENTS

or LED power supply set 830mA-DC / 36	300 90 145
or LED power supply set 830mA-DC / 36 DIM1	300 90 146
or LED power supply set 830mA-DC / 36 DIM5	300 90 147

P _o	36W
U	220-240V



IP20

Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm
Protégé contre les objets solides de plus de 12 mm
Geschützt gegen Festkörper größer als 12 mm
Protected against solid objects greater than 12 mm
Protegido contra objetos sólidos superiores a 12 mm
Protetto contro oggetti solidi più grandi di 12 mm




Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)

1




**CEILING
SURFACE
MOUNTED**

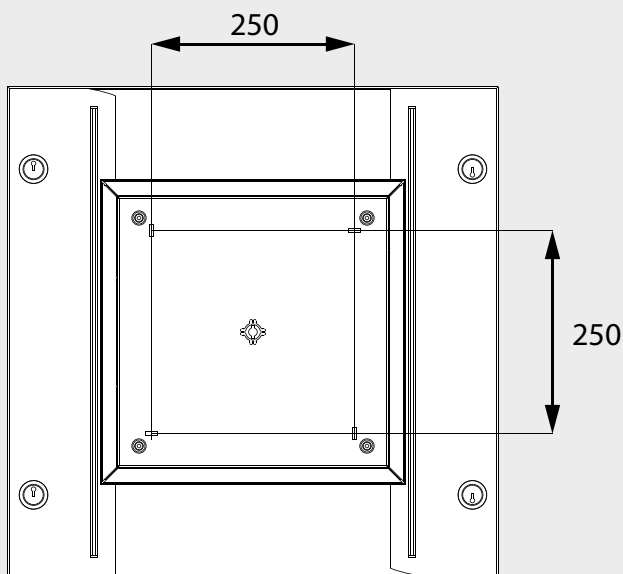



1





**CEILING
SURFACE
SUSPENDED**

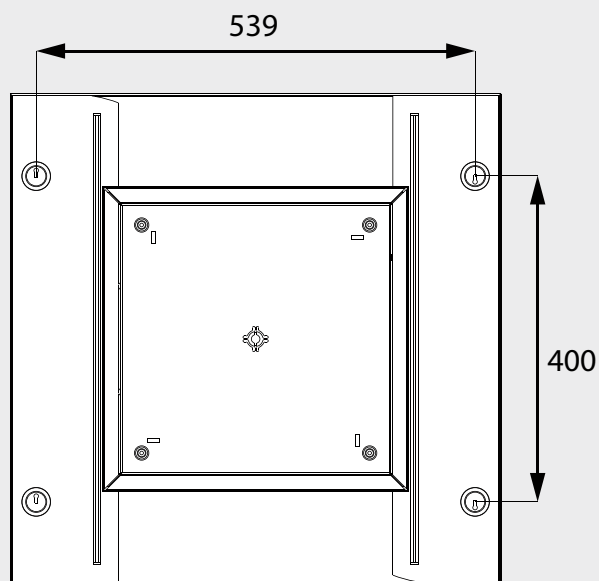



 **CEILING
SURFACE
MOUNTED**

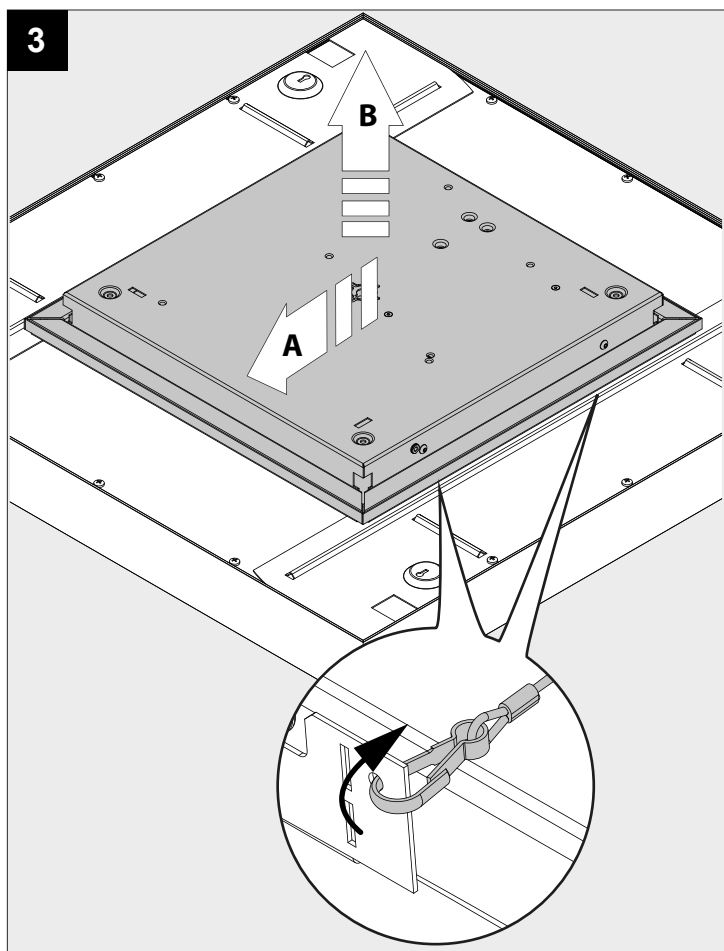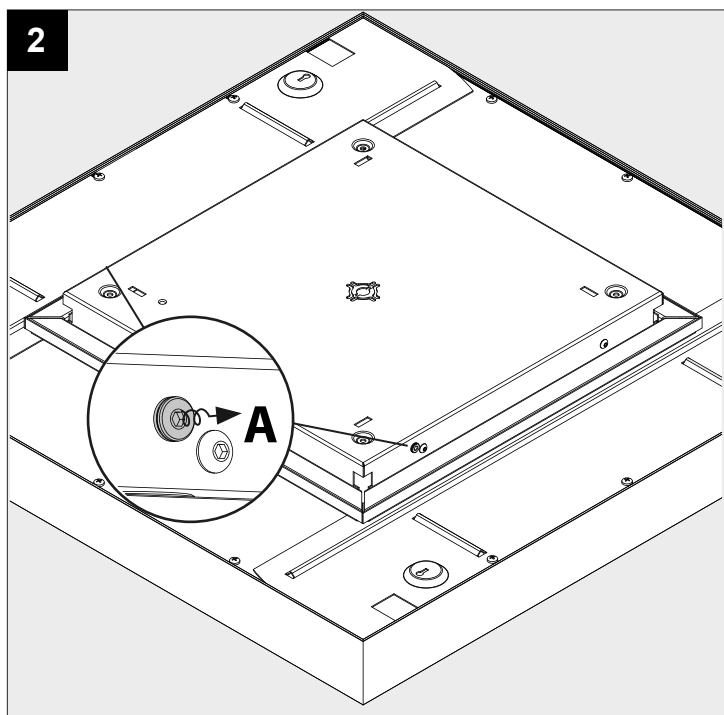




 **CEILING
SURFACE
SUSPENDED**

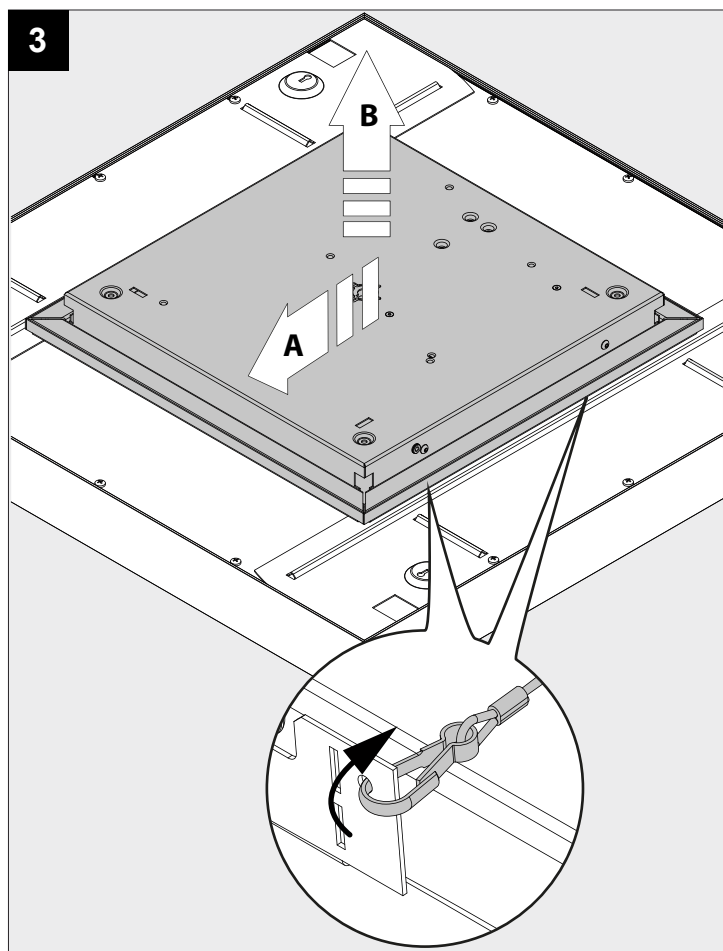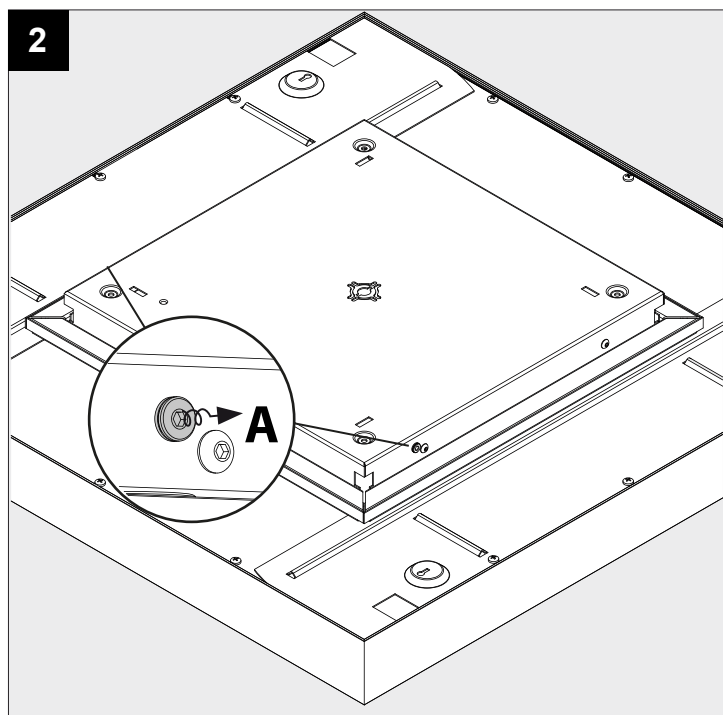

 **CEILING
SURFACE
MOUNTED**

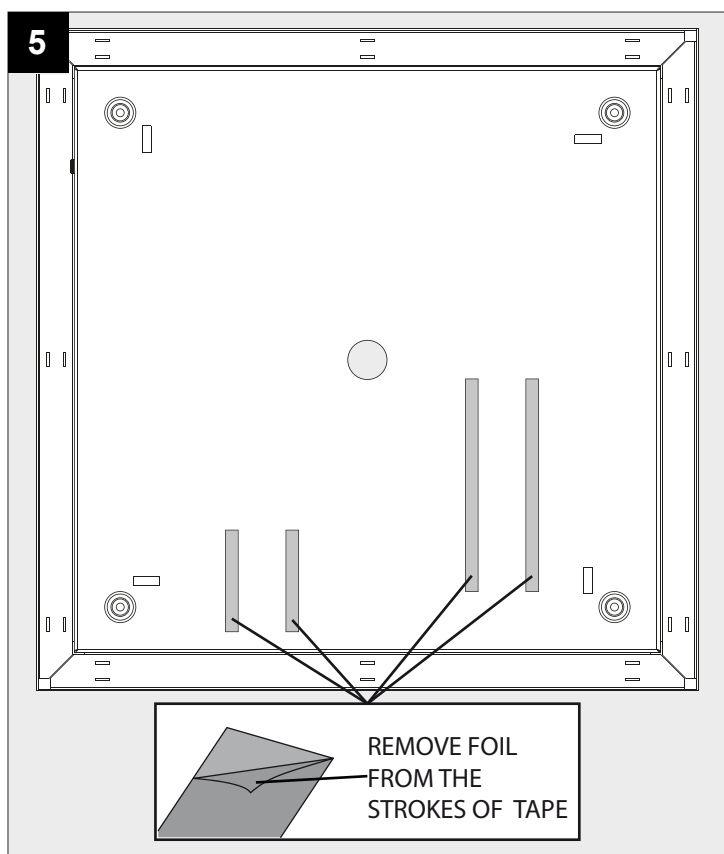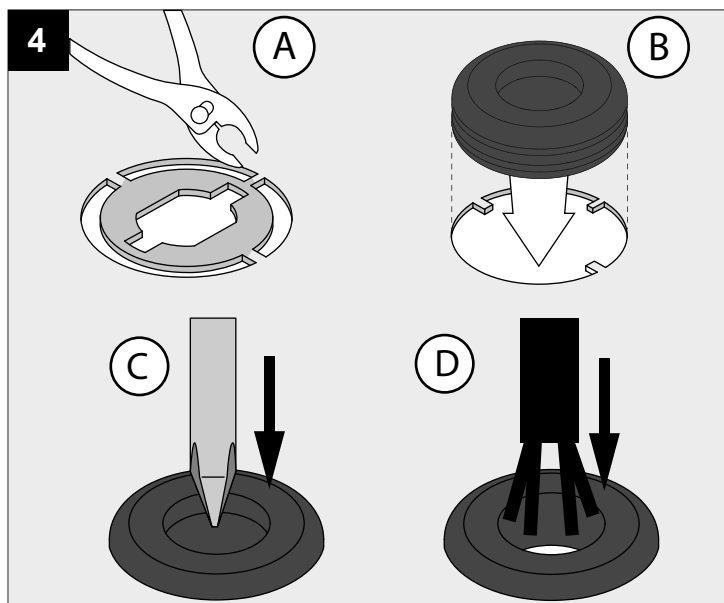




 **CEILING
SURFACE
SUSPENDED**

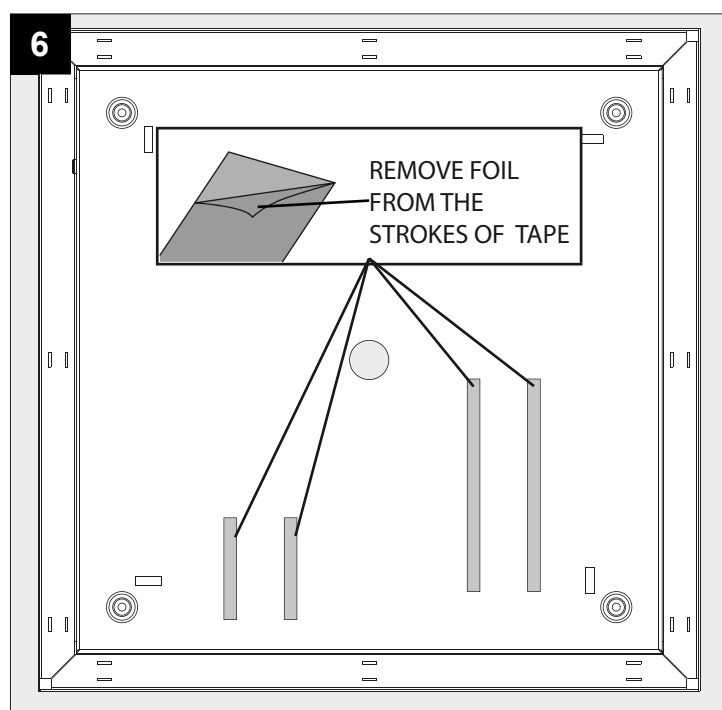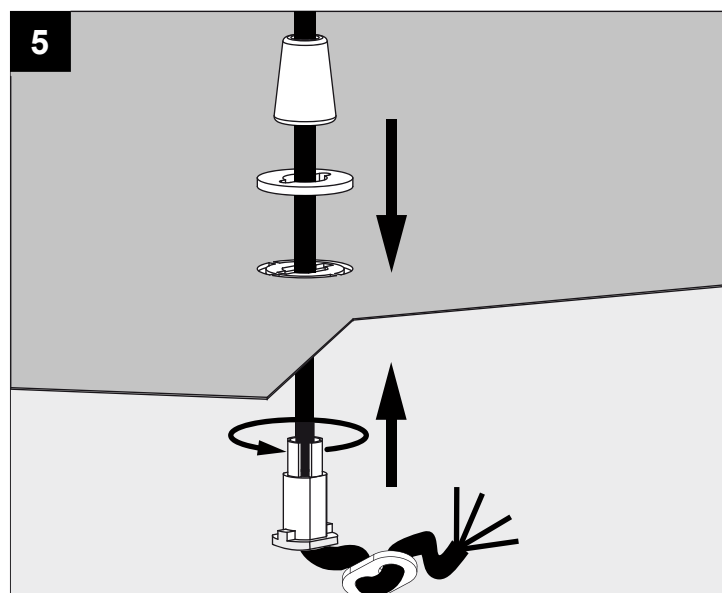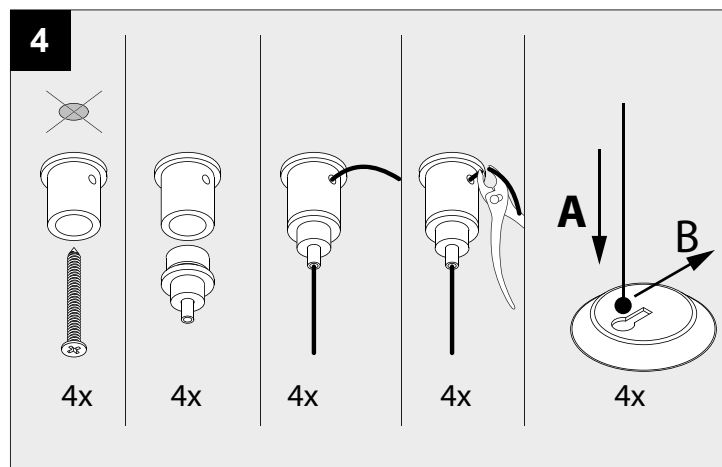






6

**ELECTRICAL CONNECTION
SEE PAGE 6**

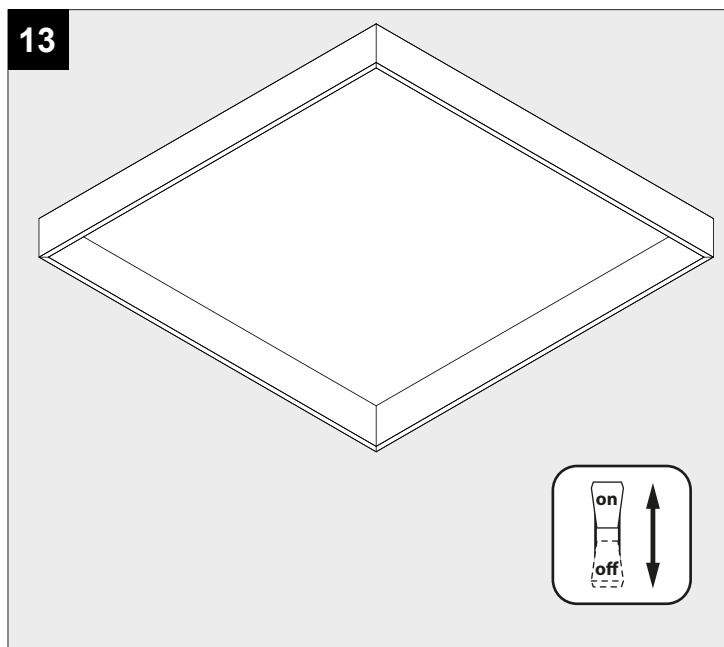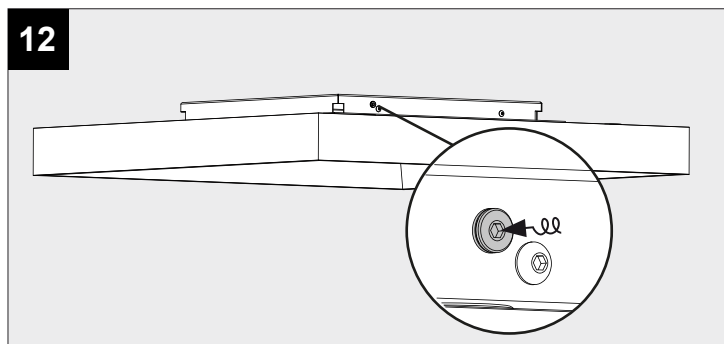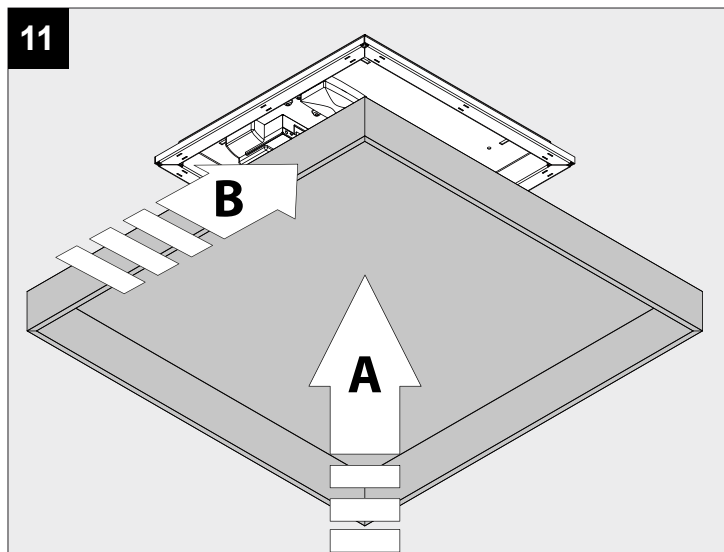

7

**ELECTRICAL CONNECTION
SEE PAGE 6**

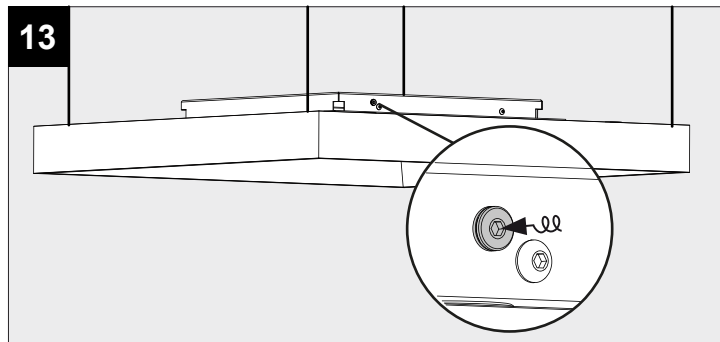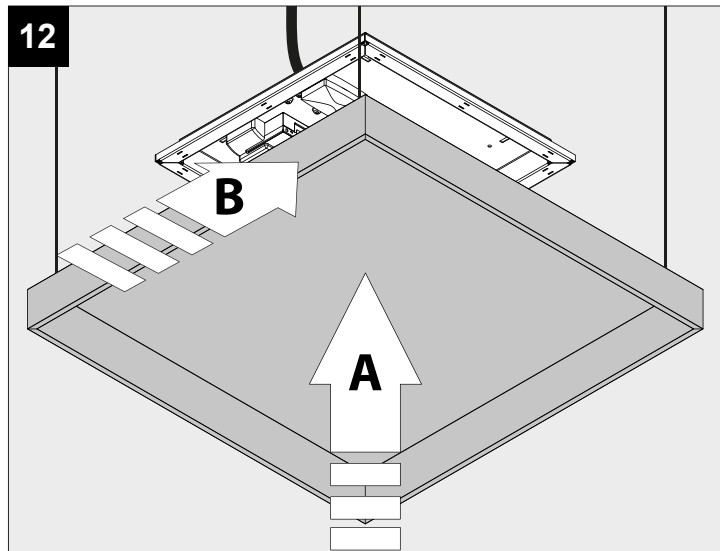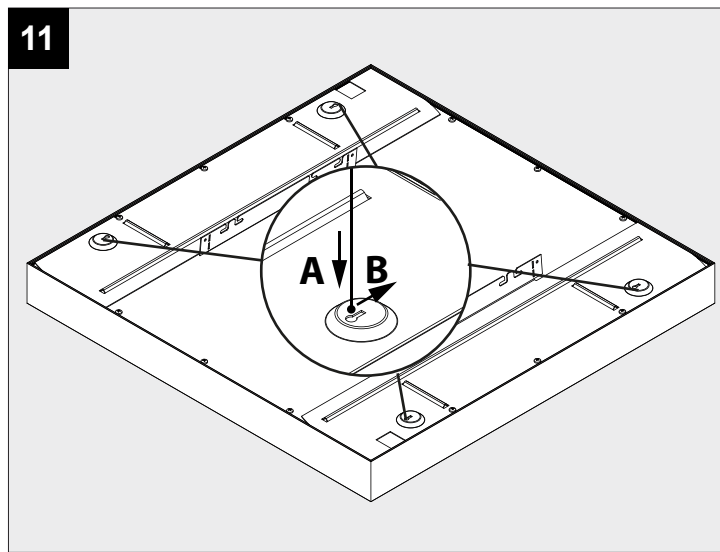



De verlichtingsbron van dit verlichtingstoestel zal enkel door de fabrikant of door de fabrikant aangestelde installateur vervangen worden.


La source lumière de cet appareil ne sera remplacée que par l'entreprise ou par un agent reconnu.

Das enthaltene Leuchtmittel sollte nur durch entsprechendes Fachpersonal ersetzt werden.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent.

La fuente de iluminación que tiene esta luminaria sólo puede remplazarse por el fabricante o por un instalador autorizado.

La sorgente luminosa incorporata in questo apparecchio può essere sostituita solo dal produttore, da un suo centro assistenza oppure da una persona in possesso della necessaria abilitazione.

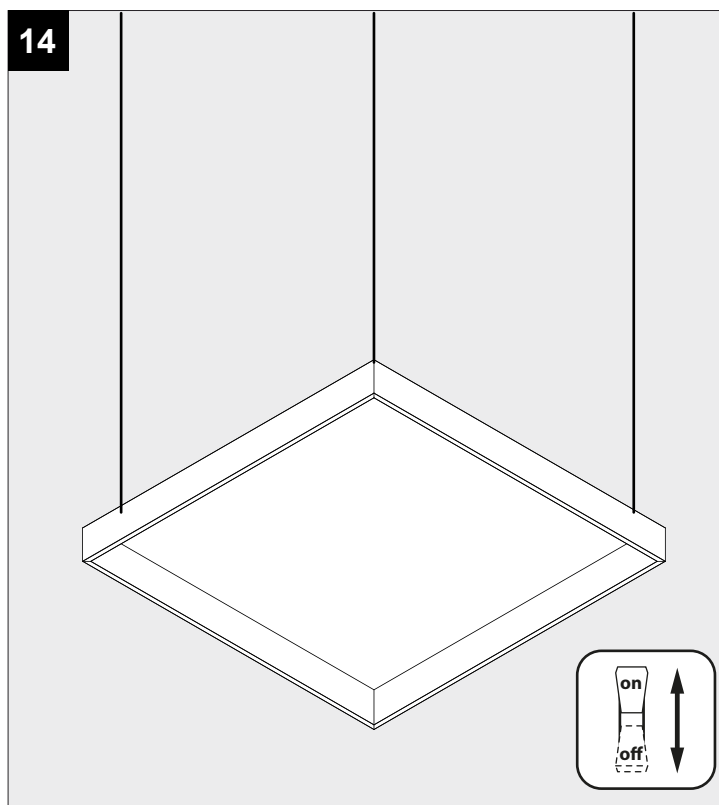

De verlichtingsbron van dit verlichtingstoestel zal enkel door de fabrikant of door de fabrikant aangestelde installateur vervangen worden.

La source lumière de cet appareil ne sera remplacée que par l'entreprise ou par un agent reconnu.




Das enthaltene Leuchtmittel sollte nur durch entsprechendes Fachpersonal ersetzt werden.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent.




La fuente de iluminación que tiene esta luminaria sólo puede remplazarse por el fabricante o por un instalador autorizado.

La sorgente luminosa incorporata in questo apparecchio può essere sostituita solo dal produttore, da un suo centro assistenza oppure da una persona in possesso della necessaria abilitazione.



EVG

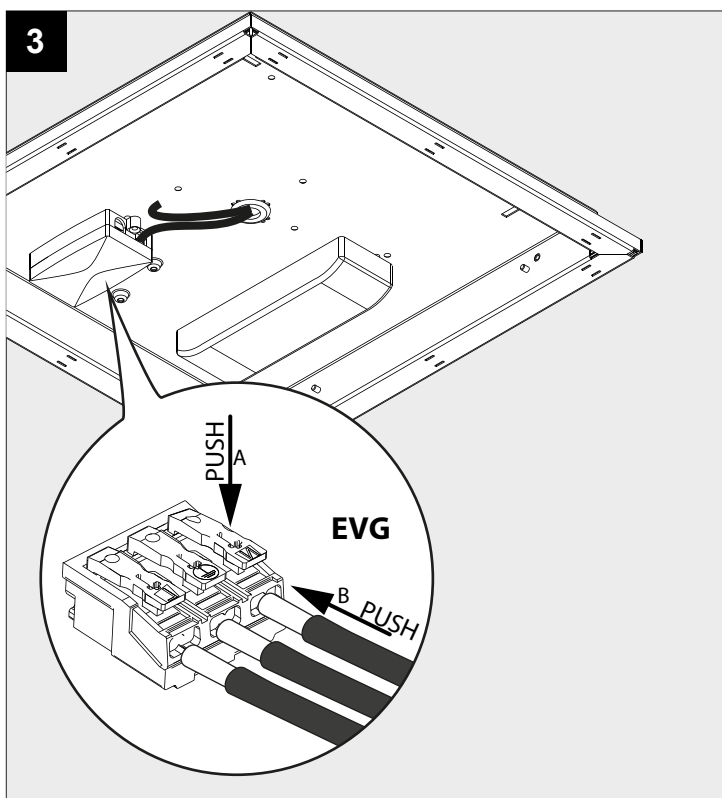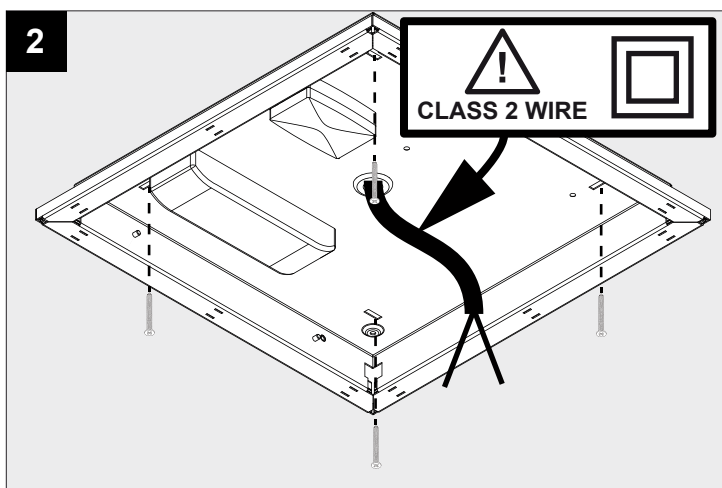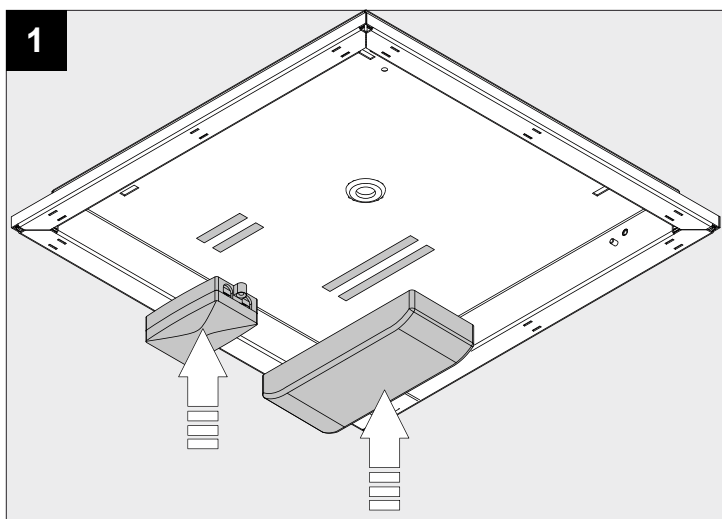



DIM1 & DIM5

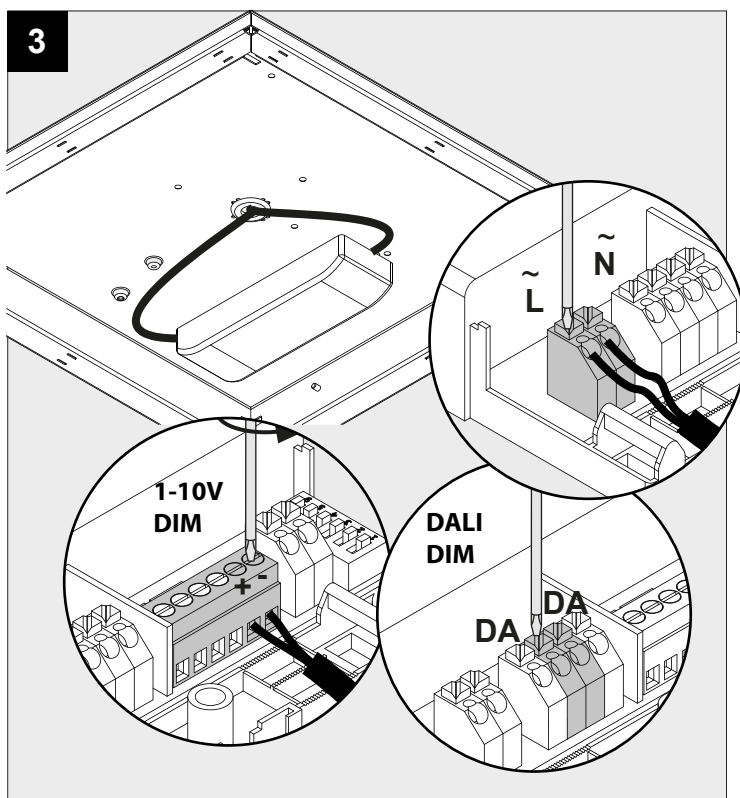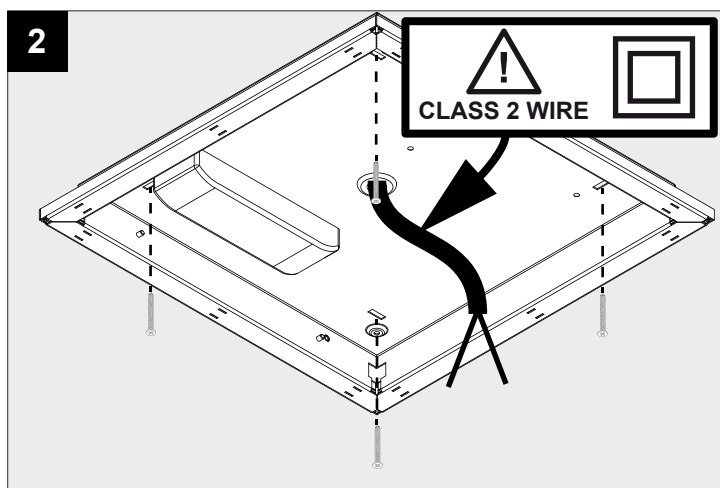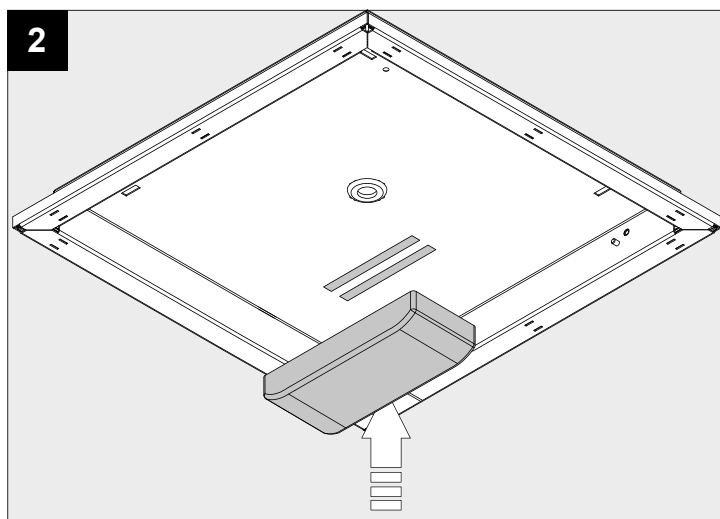

EVG

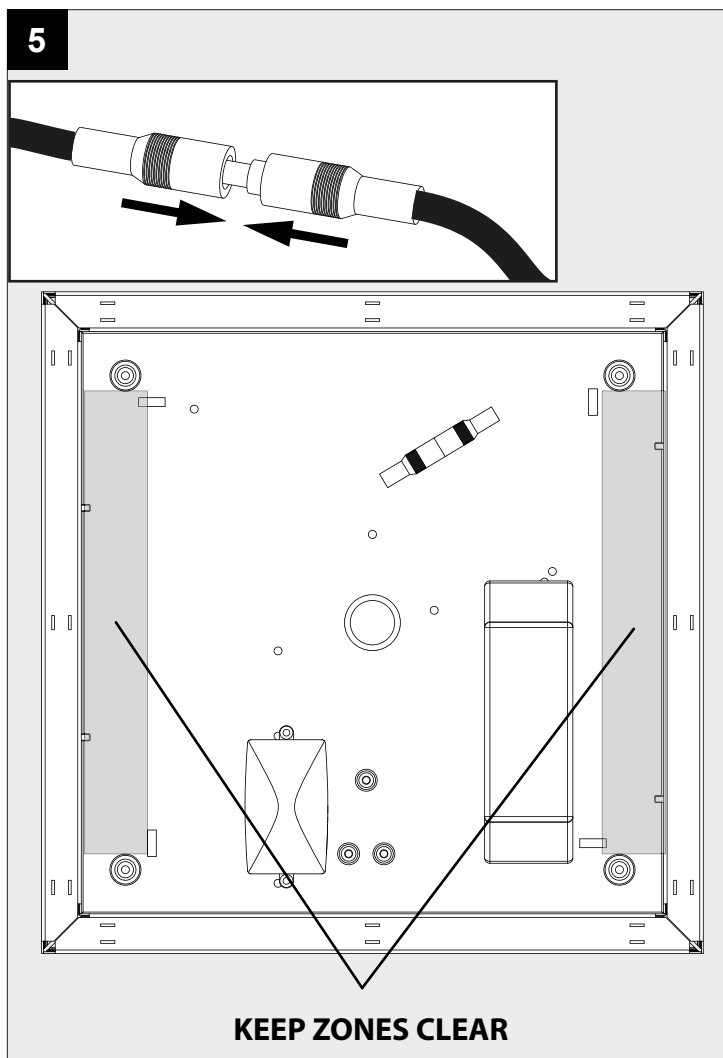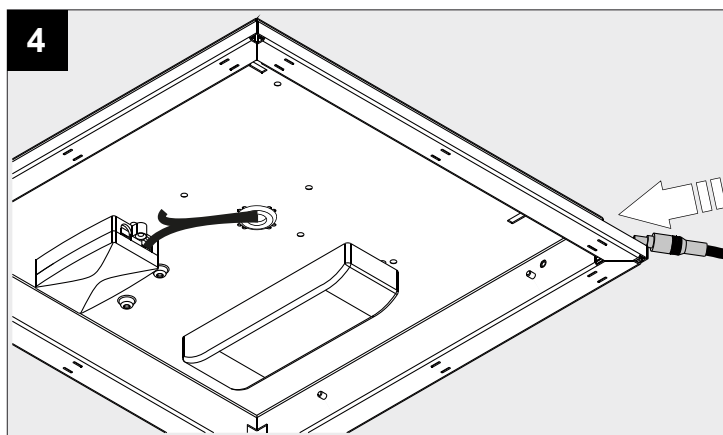

DIM1 & DIM5

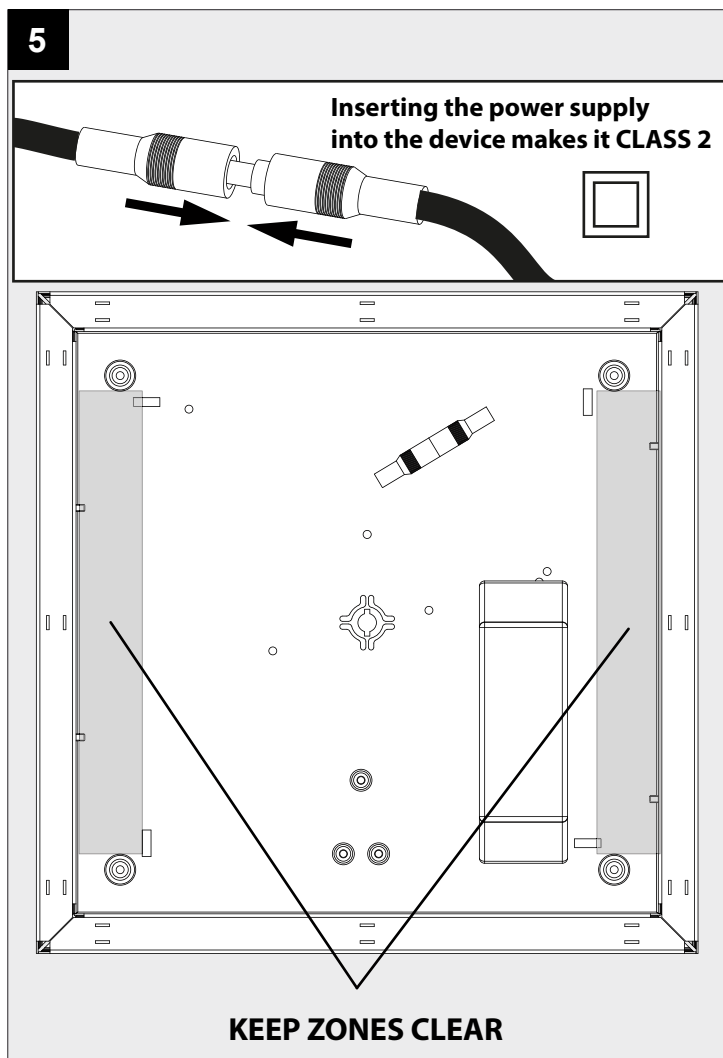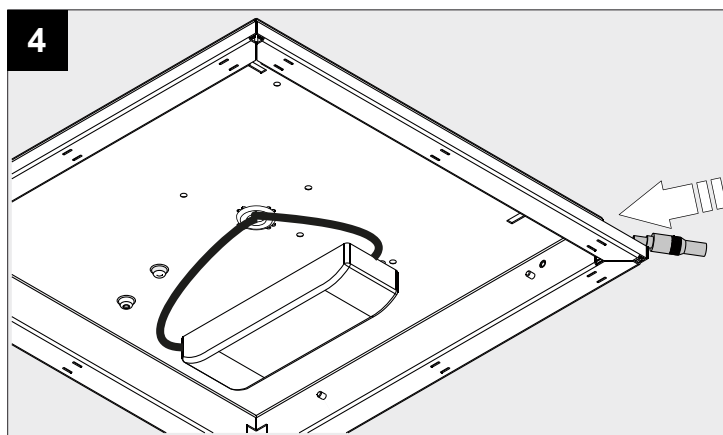

OPTIONAL

CABLE BASE R ◇

203 99 55 ◇

◇ = ANO / B / W


Ø57 x 41



CABLE BASE S ◇

203 99 56 ◇

◇ = ANO / B / W

57 x 57 x 41



CABLE BASE R

