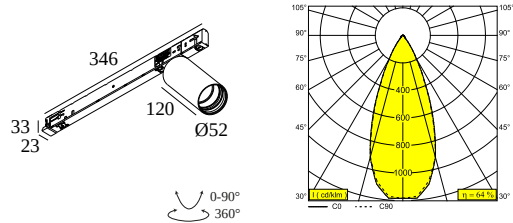




SPY 52 92745 ADM SLIM DIM5

19836 9235 W

AVAILABLE IN
BLACK 19836 9235 B
WHITE 19836 9235 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 360° rotatable
INFORMATION	REFLECTOR WFL-45° 3F MULTI DIMMABLE POWER SLIM ADAPTER 350-700mA Current selection via jumper on adapter Optional REFLECTORS 20° & 30° available
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	@ 700mA: LED array 12,4W / CRI>90 (R9: 60) / 2700K / 1403lm Or @ 500mA: LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm Or @ 350mA: LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm
TM-30 VALUES	@ 700mA: rf: 89 / Rg: 100 @ 500mA: rf: 89 / Rg: 100 @ 350mA: rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	@ 700mA: 1403lm // 12,4W // 113lm/W Or @ 500mA: 1041lm // 8,6W // 121lm/W Or @ 350mA: 753lm // 5,8W // 129lm/W
LED TECHNICS (LUMINAIRE)	@ 700mA: 898lm // 14,3W // 63lm/W Or @ 500mA: 666lm // 9,9W // 67lm/W Or @ 350mA: 482lm // 6,7W // 72lm/W

DELTALIGHT

SPY 52 92745 ADM SLIM DIM5

19836 9235 W

Requirements

SPY 52 TUBE
TRACK 3F DIM






Accessories

HONEYCOMB 42
SPREAD LENS 42
LINEAR SPREAD LENS 42
SOFTENING LENS 42
GLASS SBL 42

For detailed installation instructions, please consult the manual : [19836_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices

	19810 0010 B HONEYCOMB 42 SINGLE USE B	☐
	19810 0020 LINEAR SPREAD LENS 42	☐
	19810 0030 SPREAD LENS 42	☐
	19810 0040 SOFTENING LENS 42	☐
	19810 0050 GLASS SBL 42	☐
	19810 0060 B HONEYCOMB 42 DOUBLE USE B	☐

DELTALIGHT

SPY 52 92745 ADM SLIM DIM5

19836 9235 W

Finish your product

	19810 0100 B SPY 52 TUBE B	☐
	19810 0100 FBR SPY 52 TUBE FBR	☐
	19810 0100 FG SPY 52 TUBE FG	☐
	19810 0100 GC SPY 52 TUBE GC	☐
	19810 0100 W SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180 SPY 52 REFLECTOR 20°	☐
	19810 0190 SPY 52 REFLECTOR 45°	☐
	19810 0240 SPY 52 REFLECTOR 30°	☐

COMPATIBLE TRACKS

TRACK 3F DIM H				Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m	1.6 kg	 
200 14 420	TRACK 3F DIM H 2m	2000 m	3.2 kg	 
200 14 430	TRACK 3F DIM H 3m	3000 m	4.8 kg	 
TRACK 3F DIM IN				Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m	1.2 kg	 

DELTALIGHT

SPY 52 92745 ADM SLIM DIM5

19836 9235 W

200 13 420 TRACK 3F DIM IN 2m	2000 m	2.4 kg	 
200 13 430 TRACK 3F DIM IN 3m	3000 m	3.5 kg	 
TRACK 3F DIM ON			Available Colours
200 12 410 TRACK 3F DIM ON 1m	1000 m	1.1 kg	  
200 12 420 TRACK 3F DIM ON 2m	2000 m	2.1 kg	  
200 12 430 TRACK 3F DIM ON 3m	3000 m	3.1 kg	  

Notes: