




FRAX M 93047 DIM5

26011 9385 N

AVAILABLE IN  
**ALU GREY** 26011 9385 A  
**FLEMISH BRONZE OUTDOOR** 26011 9385 FBRX  
**ANTHRACITE** 26011 9385 N

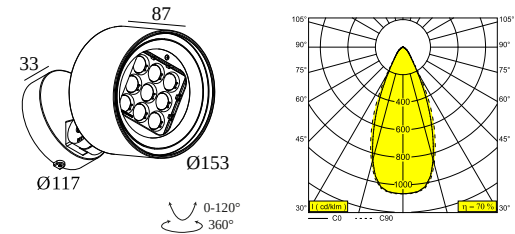

 [View on website](#)



| General info                         |                                                                                  |
|--------------------------------------|----------------------------------------------------------------------------------|
| LOCATION                             | outdoor                                                                          |
| INSTALLATION                         | Floor Surface mounted,Wall Surface mounted                                       |
| INGRESS PROTECTION                   | IP65                                                                             |
| PROTECTION AGAINST MECHANICAL IMPACT | IK08                                                                             |
| WEIGHT (KG)                          | 2.4                                                                              |
| ADJUSTABILITY                        | 0° to 120° swiveling, 360° rotatable                                             |
| INFORMATION                          | 9 x LENS SP-14°<br>INCL.DIMMABLE LED POWER SUPPLY 900mA-DC<br>INCL.BEAM LENS 47° |

| Electrical info |                    |
|-----------------|--------------------|
| ELECTRICAL      | 110-277V / 50-60Hz |
| CLASS           | I                  |
| POWER SUPPLY    | YES                |
| DIM TYPE        | DALI               |
| ENERGY CLASS    | F                  |
| CERTIFICATES    | EPD, RCM           |

| Lightsource info            |                                                      |
|-----------------------------|------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                  |
| LIGHTSOURCE                 | LED cluster 23,4W / CRI>90 (R9: 60) / 3000K / 2654lm |
| TM-30 VALUES                | Rf: 92 / Rg: 99                                      |
| SDCM                        | SDCM3                                                |
| RISKGROUP                   | RG2                                                  |
| LM80                        | L80 > 150000                                         |
| BEAMANGLE                   | 47°                                                  |
| LED TECHNICS (LIGHT SOURCE) | 2654lm // 23,4W // 113lm/W                           |
| LED TECHNICS (LUMINAIRE)    | 1858lm // 26,9W // 69lm/W                            |

| Options                 |  |
|-------------------------|--|
| FRAX ANTI VANDAL SCREWS |  |

| Accessories |  |
|-------------|--|
| FRAX M KAP  |  |

For detailed installation instructions, please consult the manual : [26011\\_XX85\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



**26070 0020 N** FRAX M KAP N

☐

Other



**26070 0030** FRAX ANTI VANDAL SCREWS 5 PCS

☐

Notes: