



KIX



Despite its low profile appearance, Kix excels in light output and quality, ideal for walkway lighting or other landscape applications. Kix is easy and flexible to use thanks to the adjustable head, available in three sizes with increasing output.

Specification	Kix	Kix Pin Mount
Adjustability:	Adjustable 0-180° / 360°	Adjustable 0-180°
Rating:	IP68	

Performance	Kix S	Kix M	Kix L
CRI:	90	90	90
*LP:	1W		7W
*MP:	1.4W	7W	
*HP:	2W		19W

Delivered Lumens	3000K			
** See page 3 for full details	SS/NS	MD	FL	WF
Kix S LP:	93Lm			
Kix S MP:	137Lm			
Kix S HP:	171Lm			
Kix M MP:		199Lm		
Kix L LP:	698Lm	644Lm	646Lm	602Lm
Kix L HP:	2047Lm	1888Lm	1894Lm	

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: KIXM-MPSP30-A-PXAXRMTND-24

Luminaire	Size	Power*	Optic	CCT	Finish	Installation	Function	Application	Controls***
KIX KIX	S 34mm / 1 ⁵ / ₁₆ " diameter	LP Low Power MP Medium Power HP High Power	SS Super Spot 10°	27 2700K 30 3000K	N Anthracite PGR ⁽³⁾ Pine Green	DM ⁽³⁾ Direct Mount PM Pin Mount	AX Adjustable, Exterior use	RMT Remote Power Supply	ND-24 ⁽²⁾ Non dim 24V D1-UNV 0-10V dim 120-277V D8-120 FE ELV dim 120V
	M 54mm / 2 ¹ / ₈ " diameter	MP Medium Power	MD Medium Spot 30°	27 2700K 30 3000K	A Alu Grey N Anthracite PGR ⁽³⁾ Pine Green	DM ⁽³⁾ Direct Mount MK ⁽³⁾ Mud kit for 4" junction box PM Pin Mount PX ⁽³⁾ Coverplate for 4" junction box in corresponding finish			
	L 105mm / 4 ¹ / ₈ " diameter	LP Low Power HP ⁽¹⁾ High Power	NS Narrow Spot 11° MD Medium Spot 30° FL Flood 55° WF ⁽¹⁾ Wide Flood 120°	35 3500K					

1 WF only available with Power LP.

2 ND-24 available with Kix S HP, Kix M, and Kix L LP.

3 Finish PGR only available in Installation PM.

*** Contact factory for Dali, DMX, or other dimming options.

Related Products

Frax

 DELTALIGHT®


www.deltalight.com





Finish Options

KIX S - Installation DM, MK, PX

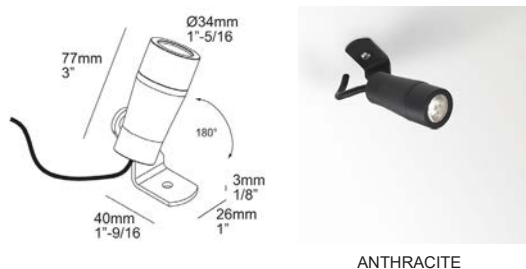

KIXS - Installation PM



KIX M - Installation DM, MK, PX



KIX M - Installation PM



KIX L - Installation DM, MK, PX




KIX L - Installation PM



Accessories



JUNCTION BOX
6 216 12 00



IP68 CONNECTOR 3P
6 216 12 03



STRAP
232 20 99
KIX S Only



HONEYCOMB KIX
232 10 03 N
KIX L Only



KAP KIX
232 10 00 N
KIX L Only




Photometric Data


Delivered Lumens	2700K				3000K				3500K			
Optic:	SS/NS	MD	FL	WF	SS/NS	MD	FL	WF	NS	MD	FL	WF
Kix S LP:	86Lm				93Lm							
Kix S MP:	127Lm				137Lm							
Kix S HP:	157Lm				171Lm							
Kix M MP:		199Lm				199Lm				199Lm		
Kix L LP:	667Lm	616Lm	618Lm	576Lm	698Lm	644Lm	646Lm	602Lm	723Lm	667Lm	669Lm	624Lm
Kix L HP:	1958Lm	1807Lm	1812Lm		2047Lm	1888Lm	1894Lm		2121Lm	1957Lm	1963Lm	

KIX S

KIX M




SS - 10°




MD - 30°


KIX L LP




NS - 11°



MD - 30°




FL - 55°




WF - 120°


KIX L HP



NS - 11°



MD - 30°




FL - 55°

Installation Options

Remote Driver (With Controls D8)

A: 8" x B: 2"-1/2 x C: 2"-1/2
A: 203mm x B: 64mm x C: 64mm


- For Remote application
- ETL Listed
- Damp rated



Remote Driver (With Controls D1)

A: 8" x B: 2"-3/16 x C: 4"-1/4
A: 203mm x B: 72mm x C: 108mm

- For Remote application
- ETL Listed
- Damp rated





Installation Options (cont'd)



Remote Driver (With Control ND)

PRX - COVERPLATE R 116


MK - MUD KIT 2

A: 12" x B: 2"-7/8 x C: 4"-1/4
A: 305mm x B: 72mm x C: 108mm

- For Remote application
- ETL Listed
- Damp rated



ALU GREY or ANTHRACITE
Requires 4" junction box



Requires 4" junction box

Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.7mA
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥87
- THD @ Full Load <20%
- Title 24 Compliant

Dimmer Compatibility

- Leviton IP710-DLZ
- Lutron DDTV-XX
- WattStopper ADF-120277
- Synergy Lighting Controls ISD BC

Leviton IPE04-1LZ
Lutron DVELV-300P

D8 (With High Power only)

- Dimming Control Phase Control
- Dimming Range 20-100%
- Dim to off yes
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥80
- THD @ Full Load <10%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

D8 (With Low Power & Medium Power)

- Dimming Control Phase Control
- Dimming Range 10-100%
- Dim to off no
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥78
- THD @ Full Load <12%

Dimmer Compatibility

-
-

ND

- Dimming Control NON DIMMABLE
- Power Factor @ Full Load >0.95
- Efficiency @ Full Load ≥90
- THD @ Full Load <10%

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.