



EXCLUSIVELY AVAILABLE IN INDIA

COMPO S TW 96541

9 15713 9030 B


AVAILABLE IN

NEGRO 9 15713 9030 B

CHROMO 9 15713 9030 C

CHROMO OSCURO 9 15713 9030 DC

BLANCO 9 15713 9030 W

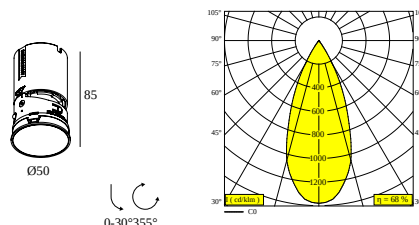

 [View on website](#)



General info

LOCATION	interior
INSTALLATION	Techo Empotrado
CUTOUT SHAPE/SIZE (MM)	redondo - 90
RECESSED DEPTH (MM)	85
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.128
ADJUSTABILITY	0° to 30° giratorio, 355° orientable

Electrical info

CLASS	III
DIM TYPE	dependiendo del tipo de fuente de alimentación externa
ENERGY CLASS	G

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,4W / CRI>90 / 2700K-6500K / 522lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 56000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	522lm // 5,4W // 97lm/W
LED TECHNICS (LUMINAIRE)	352lm // 6,2W // 57lm/W

Requirements

LED POWER SUPPLY 150 mA - DC

Accessories

COMPO S HONEYCOMB SINGLE USE B

COMPO S LINEAR SPREAD LENS

COMPO S SPREAD LENS

COMPO S SOFTENING LENS

COMPO S GLASS SBL

For detailed installation instructions, please consult the manual : [9_15713_XXXX_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required

FINISH YOUR SPECIFICATION

Fuente de alimentación LED

of Fixtures


 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

15710 5700 LED POWER SUPPLY MULTIPOWER 12W DALI DT8 150mA

1

Mounting Kit



15710 0010 B MOUNTING KIT COMPO S TRIM B

Cutout dimension (mm): 55

15710 0010 W MOUNTING KIT COMPO S TRIM W



15710 0040 MOUNTING KIT COMPO S TRIMLESS

Cutout dimension (mm): 55

Dispositivos de modificación de Luz

15710 0100 B COMPO S HONEYCOMB SINGLE USE B

15710 0110 COMPO S LINEAR SPREAD LENS

DELTALIGHT

COMPO S TW 96541

9 15713 9030 B

Cutout dimension (mm): 26,5

15710 0120 COMPO S SPREAD LENS



Cutout dimension (mm): 26,5

15710 0130 COMPO S SOFTENING LENS



Cutout dimension (mm): 26,5

15710 0140 COMPO S GLASS SBL



Cutout dimension (mm): 26,5

Notes: