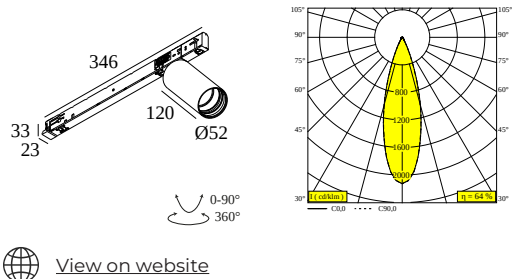




SPY 52 SOFT 93030 ADM SLIM
DIM5

19845 9045 W

AVAILABLE IN
BLACK 19845 9045 B
WHITE 19845 9045 W








General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 90° swiveling, 360° rotatable
INFORMATION	REFLECTOR FL-30° 3F MULTI DIMMABLE POWER SLIM ADAPTER 500mA Optional REFLECTORS 20° & 45° available
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	662lm // 11,7W // 56lm/W

Requirements	
SPY 52 TUBE	
TRACK 3F DIM	
Accessories	
HONEYCOMB 42	
SPREAD LENS 42	
LINEAR SPREAD LENS 42	
SOFTENING LENS 42	
GLASS SBL 42	


For detailed installation instructions, please consult the manual : [19845_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices

	19810 0010 B	HONEYCOMB 42 SINGLE USE B	☐
	19810 0020	LINEAR SPREAD LENS 42	☐
	19810 0030	SPREAD LENS 42	☐
	19810 0040	SOFTENING LENS 42	☐
	19810 0050	GLASS SBL 42	☐
	19810 0060 B	HONEYCOMB 42 DOUBLE USE B	☐

Finish your product

	19810 0100 B	SPY 52 TUBE B	☐
--	---------------------	---------------	--------------------------


DELTALIGHT

SPY 52 SOFT 93030 ADM SLIM DIM5

19845 9045 W

19810 0100 FBR	SPY 52 TUBE FBR	☐
19810 0100 FG	SPY 52 TUBE FG	☐
19810 0100 GC	SPY 52 TUBE GC	☐
19810 0100 W	SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180	SPY 52 REFLECTOR 20°	☐
	19810 0190	SPY 52 REFLECTOR 45°	☐
	19810 0240	SPY 52 REFLECTOR 30°	☐

COMPATIBLE TRACKS

TRACK 3F DIM H				Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m	1.6 kg	☒ ☐
200 14 420	TRACK 3F DIM H 2m	2000 m	3.2 kg	☒ ☐
200 14 430	TRACK 3F DIM H 3m	3000 m	4.8 kg	☒ ☐
TRACK 3F DIM IN				Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m	1.2 kg	☒ ☐
200 13 420	TRACK 3F DIM IN 2m	2000 m	2.4 kg	☒ ☐
200 13 430	TRACK 3F DIM IN 3m	3000 m	3.5 kg	☒ ☐
TRACK 3F DIM ON				Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m	1.1 kg	☐ ☒ ☐

DELTALIGHT

SPY 52 SOFT 93030 ADM SLIM DIM5

19845 9045 W

200 12 420 TRACK 3F DIM ON 2m	2000 m 2.1 kg	  
200 12 430 TRACK 3F DIM ON 3m	3000 m 3.1 kg	  

Notes: