



COMPO M 92741

9 15727 9230 B


AVAILABLE IN

NEGRO 9 15727 9230 B

CHROMO 9 15727 9230 C

CHROMO OSCURO 9 15727 9230 DC

BLANCO 9 15727 9230 W

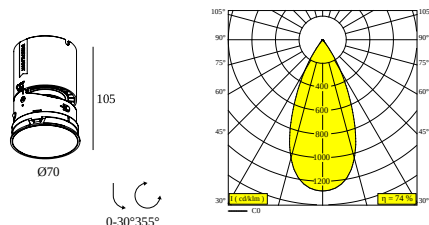

 [View on website](#)



General info	
LOCATION	interior
INSTALLATION	Techo Empotrado
CUTOUT SHAPE/SIZE (MM)	redondo - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.256
ADJUSTABILITY	0° to 30° giratorio, 355° orientable

Electrical info	
CLASS	III
DIM TYPE	dependiendo del tipo de fuente de alimentación externa
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 12,5W / CRI>90 (R9: 60) / 2700K / 1318lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	1318lm // 12,5W // 105lm/W
LED TECHNICS (LUMINAIRE)	981lm // 14,4W // 68lm/W

Requirements	
LED POWER SUPPLY 700 mA - DC	

Accessories	
COMPO M HONEYCOMB SINGLE USE B	
COMPO M LINEAR SPREAD LENS	
COMPO M SPREAD LENS	
COMPO M SOFTENING LENS	
COMPO M GLASS SBL	

For detailed installation instructions, please consult the manual : [9_15727_XXX0_HAND.pdf](#)

DELTALIGHT

COMPO M 92741

9 15727 9230 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

Fuente de alimentación LED

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

15710 3100 LED POWER SUPPLY 18W NO DIM 1400mA

1->4

15710 3500 LED POWER SUPPLY MULTIPOWER 15W NO DIM 700mA

1

15710 4000 LED POWER SUPPLY MULTIPOWER 15W DIM8 700mA

1

15710 4900 LED POWER SUPPLY MULTIPOWER 20W DIM1 700mA

1

15710 5000 LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA

1->13

Dimtype: con DALI

15710 5600 LED POWER SUPPLY MULTIPOWER 20W DALI DT6 700mA

1

Dimtype: con DALI

Mounting Kit



15710 0020 B MOUNTING KIT COMPO M TRIM B

Cutout dimension (mm): 76

15710 0020 W MOUNTING KIT COMPO M TRIM W

COMPO M 92741

9 15727 9230 B



15710 0050 MOUNTING KIT COMPO M TRIMLESS

☐

Cutout dimension (mm): 76

Dispositivos de modificación de Luz

15710 1100 B COMPO M HONEYCOMB SINGLE USE B

☐

15710 1110 COMPO M LINEAR SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1120 COMPO M SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1130 COMPO M SOFTENING LENS

☐

Cutout dimension (mm): 32,5

15710 1140 COMPO M GLASS SBL

☐

Cutout dimension (mm): 32,5

Notes: