




MULTINOVA 55 PRISM 930

28012 9300 B

AVAILABLE IN
BLACK 28012 9300 B
WHITE 28012 9300 W

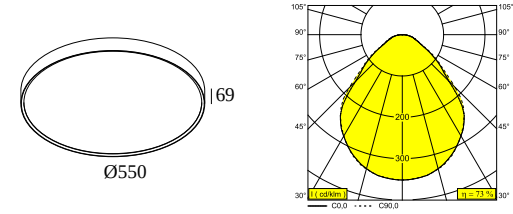

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed,Ceiling Surface mounted,Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	4.5
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PC PRISMATIC INCL.LED POWER SUPPLY
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 34,4W / CRI>90 (R9: 68) / 3000K / 4767lm
TM-30 VALUES	Rf: 89 / Rg: 97
SDCM	SDCM3
LM80	L70 > 60000
LED TECHNICS (LIGHT SOURCE)	4767lm // 34,4W // 139lm/W
LED TECHNICS (LUMINAIRE)	3466lm // 39,6W // 88lm/W
Options	
MULTINOVA 55 SUSPENSION SET	
MULTINOVA ROD SUSPENSION	
MULTINOVA 55 RECESSED KIT	

For detailed installation instructions, please consult the manual : [28012_XXX0_HAND.pdf](#)

DELTALIGHT

MULTINOVA 55 PRISM 930


28012 9300 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 28010 0050 - MULTINOVA 55 RECESSED KIT Required
 Plasterboard	 28010 0050 - MULTINOVA 55 RECESSED KIT Required
 Stucanet	 28010 0050 - MULTINOVA 55 RECESSED KIT Required
 Concrete + plaster	 28010 0050 - MULTINOVA 55 RECESSED KIT Required
 Lintel + plaster	 28010 0050 - MULTINOVA 55 RECESSED KIT Required
 Hollow-core slab + plaster	 28010 0050 - MULTINOVA 55 RECESSED KIT Required

FINISH YOUR SPECIFICATION

Recessed kits




28010 0050 MULTINOVA 55 RECESSED KIT

☐

Cutout dimension (mm): 610


Suspension parts



27910 0010 B MULTINOVA 55 SUSPENSION SET 5x0,75 3m B

☐

27910 0010 W MULTINOVA 55 SUSPENSION SET 5x0,75 3m W

☐

27910 0030 B MULTINOVA 55 ROD SUSPENSION 0,4m B

☐

27910 0030 W MULTINOVA 55 ROD SUSPENSION 0,4m W

☐

DELTALIGHT

MULTINOVA 55 PRISM 930

28012 9300 B



27910 0040 B MULTINOVA 55 ROD SUSPENSION 0,8m B

☐

27910 0040 W MULTINOVA 55 ROD SUSPENSION 0,8m W

☐

Notes: