

SPYKER



The Spyker is characterized by a circular base and a wider aluminium disc on top, holding a circular led cluster. This outdoor lighting solution is available in 2 sizes, both resulting in a pleasant, soft light surrounding the fixture. This model comes in alu grey or Delta Light's typical dark grey.

Specification	
Adjustability:	Fixed
Rating:	IP55

Performance	
LED Maintenance:	L90>50,000
CRI:	90
*SP:	7.1W

Delivered Lumens:	3000K	3500K
SPYKER 11 DIFFUSE (DF):	369Lm	381Lm
SPYKER II CENTRIC (CT):	380Lm	392Lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: SKR6-SPCT30FX-A-DMINCD8-120

		-				-		-		
--	--	---	--	--	--	---	--	---	--	--

Luminaire	Height	Power*	Optic	CCT	Function	Finish	Installation	Application	Controls***
SKR SPYKER II	3 371mm / 145/8"	SP Standard Power	DF 360° Diffuse Distribution	30 3000K	FX Fixed Bollard, Exterior Use	A Alu Grey	DM Direct Mount	INC Integral Power Supply	D8- 120 FE ELV dim 120V
	6 670mm / 267/16"		CT 360° Centric Distribution	35 3500K		N Dark Grey	PM Pin Mount		

***Contact factory for additional dimming options


Related Products

BAZIL, MONOPOL, MONTUR, WALKER II



Finish Options

SPYKER II 3 DIFFUSE




ALU GREY



DARK GREY

SPYKER II 6 DIFFUSE




ALU GREY



DARK GREY

SPYKER II 3 CENTRIC





ALU GREY




DARK GREY

SPYKER II 6 CENTRIC




ALU GREY




DARK GREY

PM- PIN 3






Accessories

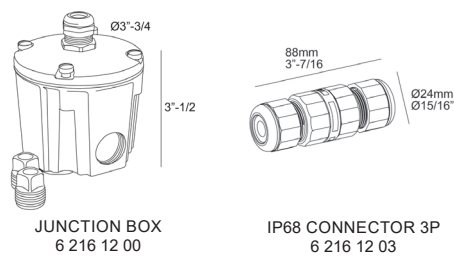


Photometric Options

SPYKER II



SPYKER II CENTRIC



Driver Options

D8

- | | |
|----------------------------|---------------|
| • Dimming Control | Phase Control |
| • Dimming Range | 10-100% |
| • Dim to off | no |
| • Power Factor @ Full Load | >0.9 |
| • Efficiency @ Full Load | ≥80 |
| • THD @ Full Load | <5% |

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.