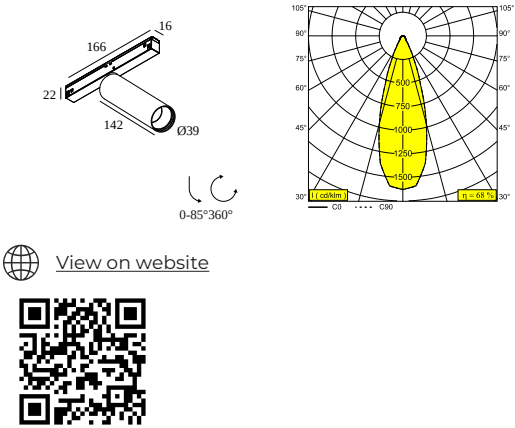




M26L - SPY 391 L 92740 DIM5

23285 9235 GC

AVAILABLE IN
BLACK 23285 9235 B
FLEMISH BRONZE 23285 9235 FBR
FLEMISH GOLD 23285 9235 FG
GOLD COLOURED 23285 9235 GC
WHITE 23285 9235 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 85° swiveling, 360° rotatable
INFORMATION	REFLECTOR WFL-40° EXCLLED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	705lm // 9,9W // 71lm/W

Remarks

Take a look at our **MAGNETIC PROFILES** movie

Requirements

SPY 39 L TUBE
LED POWER SUPPLY 48V-DC

For detailed installation instructions, please consult the manual : **23285_XXX5_HAND.pdf**

M26L - SPY 391 L 92740 DIM5

23285 9235 GC

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

10


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

24

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

10

Dimtype: non-dimmable

Cutout dimension (mm): 40




21012 0240 LED POWER SUPPLY 48V-DC / 200W

20

Dimtype: non-dimmable

Cutout dimension (mm): 40

Finish your product



24144 0020 B SPY 39 L TUBE B

24144 0020 FBR SPY 39 L TUBE FBR

24144 0020 FG SPY 39 L TUBE FG

24144 0020 GC SPY 39 L TUBE GC








24144 0020 W SPY 39 L TUBE W

DELTALIGHT

M26L - SPY 391 L 92740 DIM5

23285 9235 GC

COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)		Available Colours
	23358 0000 SLM26L - PROFILE	 
	23358 0010 SLM26L - PROFILE 1m	 
	23358 0020 SLM26L - PROFILE 2m	         
	23358 0030 SLM26L - PROFILE 3m	         
SHIFTLINE M35R profile		Available Colours
	23375 0000 SLM35R - PROFILE	
	23375 0010 SLM35R - PROFILE 1m	
	23375 0020 SLM35R - PROFILE 2m	
	23375 0030 SLM35R - PROFILE 3m	

Notes:

DELTALIGHT

M26L - SPY 391 L 92740 DIM5

23285 9235 GC