




FRAX M 92747

26011 9280 A

AVAILABLE IN  
**ALU GREY** 26011 9280 A  
**FLEMISH BRONZE OUTDOOR** 26011 9280 FBRX  
**ANTHRACITE** 26011 9280 N

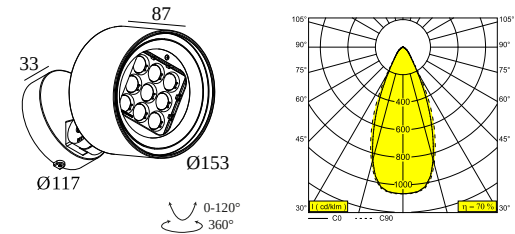

 [View on website](#)



| General info                         |                                                                        |
|--------------------------------------|------------------------------------------------------------------------|
| LOCATION                             | outdoor                                                                |
| INSTALLATION                         | Floor Surface mounted,Wall Surface mounted                             |
| INGRESS PROTECTION                   | IP65                                                                   |
| PROTECTION AGAINST MECHANICAL IMPACT | IK08                                                                   |
| WEIGHT (KG)                          | 2.4                                                                    |
| ADJUSTABILITY                        | 0° to 120° swiveling, 360° rotatable                                   |
| INFORMATION                          | 9 x LENS SP-14°<br>INCLLED POWER SUPPLY 900mA-DC<br>INCL.BEAM LENS 47° |

| Electrical info |                    |
|-----------------|--------------------|
| ELECTRICAL      | 220-240V / 50-60Hz |
| CLASS           | I                  |
| POWER SUPPLY    | YES                |
| DIM TYPE        | non-dimmable       |
| ENERGY CLASS    | E                  |
| CERTIFICATES    | CB, ENEC, EPD, RCM |

| Lightsource info            |                                                      |
|-----------------------------|------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                  |
| LIGHTSOURCE                 | LED cluster 23,4W / CRI>90 (R9: 50) / 2700K / 2423lm |
| TM-30 VALUES                | Rf: 91 / Rg: 100                                     |
| SDCM                        | SDCM3                                                |
| RISKGROUP                   | RG2                                                  |
| LM80                        | L80 > 150000                                         |
| BEAMANGLE                   | 47°                                                  |
| LED TECHNICS (LIGHT SOURCE) | 2423lm // 23,4W // 103lm/W                           |
| LED TECHNICS (LUMINAIRE)    | 1696lm // 26,9W // 63lm/W                            |


| Options                 |  |
|-------------------------|--|
| FRAX ANTI VANDAL SCREWS |  |

| Accessories |  |
|-------------|--|
| FRAX M KAP  |  |

For detailed installation instructions, please consult the manual : [26011\\_XX80\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



**26070 0020 N** FRAX M KAP N

☐

Other



**26070 0030** FRAX ANTI VANDAL SCREWS 5 PCS

☐

Notes: