




DELTALIGHT

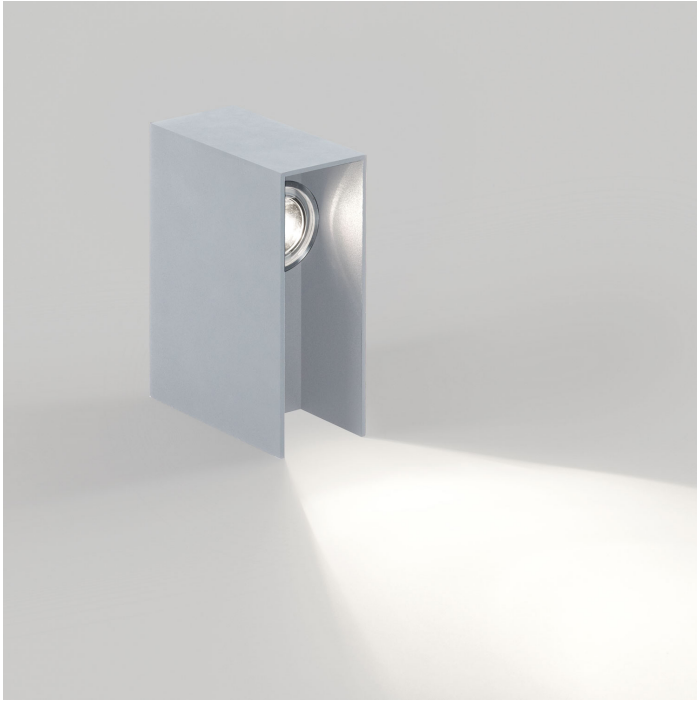

STRIPER 930

20311 9300 A

AVAILABLE IN
ALU GREY 20311 9300 A
ANTHRACITE 20311 9300 N



[View on website](#)



General info

LOCATION	outdoor
INSTALLATION	Floor Surface mounted
INGRESS PROTECTION	IP55
PROTECTION AGAINST MECHANICAL IMPACT	IK06
WEIGHT (KG)	1
ADJUSTABILITY	non adjustable
INFORMATION	LENS 4° INCLLED POWER SUPPLY 700mA-DC

Electrical info

ELECTRICAL	120-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 2W / CRI>90 (R9: 60) / 3000K / 240lm
TM-30 VALUES	rf: 92 / Rg: 99
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
BEAMANGLE	4°
LED TECHNICS (LIGHT SOURCE)	240lm // 2W // 120lm/W
LED TECHNICS (LUMINAIRE)	240lm // 2,3W // 104lm/W

Options

- PIN 1
- PLATE 1
- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P

Accessories

- KAP STRIPER

DELTALIGHT


STRIPER 930

20311 9300 A

For detailed installation instructions, please consult the manual : [20311_XXX0_HAND.pdf](#)


FINISH YOUR SPECIFICATION

Waterproof connection parts



216 12 00 CBOX

Cutout dimension (mm): 142 x 142




216 12 01 IP68 CONNECTION KIT




216 12 02 IP68 CONNECTOR 3P

Pins and plates for bollards




229 01 01 PIN 1



229 02 01 PLATE 1

Light altering devices



223 00 10 B KAP STRIPER B

DELTALIGHT

STRIPER 930

20311 9300 A

Notes: