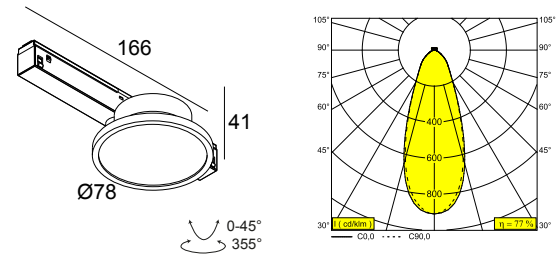




M26L - HALOSCAN MP 92735 MDL
B

23123 9230 B

AVAILABLE IN
BLACK 23123 9230 B
WHITE 23123 9230 W



 [View on website](#)

General info

LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	LENS FL-35° EXCL.LED POWER SUPPLY 48V-DC

Electrical info

ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E
CERTIFICATES	ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	799lm // 10W // 81lm/W

Remarks

Take a look at our [MAGNETIC PROFILES](#) movie

Requirements

LED POWER SUPPLY 48V-DC

Options

DIMMABLE MODULATOR

Delta Light NV may revise the information and technical data at any time without notice. Version: 28/11/2024

M26L - HALOSCAN MP 92735 MDL B

23123 9230 B

Accessories








HALOSCAN HONEYCOMB

HALOSCAN LINEAR SPREAD LENS

HALOSCAN KAP MP

For detailed installation instructions, please consult the manual: **[23123_XXX0_HAND.pdf](#)**

FINISH YOUR SPECIFICATION




Current supply		#
 <p>21032 0030 SMART 48 MODULATOR PLUG-IN WD</p>		19 <input type="checkbox"/>
SMART 48		#
 <p>300 90 011 SMART 48 MODULATOR DIM9</p>		19 <input type="checkbox"/>
 <p>300 90 012 SMART 48 MODULATOR WD</p>		19 <input type="checkbox"/>
LED power supplies		#
 <p>300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN</p>		10 <input type="checkbox"/>
 <p>300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN</p>		24 <input type="checkbox"/>
 <p>21012 0230 LED POWER SUPPLY 48V-DC / 100W</p>		10 <input type="checkbox"/>
 <p>21012 0240 LED POWER SUPPLY 48V-DC / 200W</p>		20 <input type="checkbox"/>







M26L - HALOSCAN MP 92735 MDL B

23123 9230 B

Light altering devices

 <div> 2 23110 0040 HALOSCAN LINEAR SPREAD LENS </div>	<input type="checkbox"/>
 <div> 2 23110 0050 B HALOSCAN HONEYCOMB B </div>	<input type="checkbox"/>
 <div> 15 23110 0060 B HALOSCAN KAP MP B </div>	<input type="checkbox"/>
<div> 23110 0060 W HALOSCAN KAP MP W </div>	<input type="checkbox"/>

COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
 <div> 23358 0000 SLM26L - PROFILE </div>	<div> <div></div> <div></div> </div>
 <div> 23358 0010 SLM26L - PROFILE 1m </div>	<div> <div></div> <div></div> </div>
 <div> 23358 0020 SLM26L - PROFILE 2m </div>	<div> <div></div> <div></div> <div></div> <div></div> </div>
 <div> 23358 0030 SLM26L - PROFILE 3m </div>	<div> <div></div> <div></div> <div></div> <div></div> </div>

M26L - HALOSCAN MP 92735 MDL B

23123 9230 B

Notes: