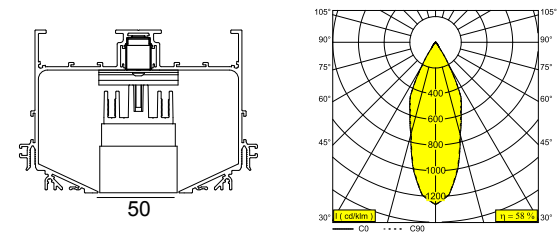




M52 - 2 LED D 93033 DIM5
24418 9325



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	non adjustable
INFORMATION	2 x REFLECTOR FL-33° EXCLLED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 5,8W / CRI>90 (R9: 52) / 3000K / 787lm)
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1574lm // 11,6W // 135lm/W
LED TECHNICS (LUMINAIRE)	914lm // 13W // 69lm/W





Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual: [24418_9X25_HAND.pdf](#)

M52 - 2 LED D 93033 DIM5









24418 9325

FINISH YOUR SPECIFICATION

LED power supplies		#
	300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN	6 <input type="checkbox"/>
	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	14 <input type="checkbox"/>
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	6 <input type="checkbox"/>
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	12 <input type="checkbox"/>

M52 - 2 LED D 93033 DIM5
24418 9325

COMPATIBLE COMPOSABLES

SPLITLINE M52 profile		Available Colours
	420 52 10 00 SPM52 - PROFILE 1m	
	420 52 20 00 SPM52 - PROFILE 2m	
	420 52 30 00 SPM52 - PROFILE 3m	
	24413 0000 SPM52 - PROFILE	

Notes: