




BOXY R 92733 DIM8 B-MMAT
251 70 811 922 ED8 B-MMAT

AVAILABLE IN
BLACK-BLACK 251 70 811 922 ED8 B-B
BLACK-FLEMISH BRONZE 251 70 811 922 ED8 B-FBR
BLACK-FLEMISH GOLD 251 70 811 922 ED8 B-FG
BLACK-GOLD MATT 251 70 811 922 ED8 B-MMAT
WHITE-BLACK 251 70 811 922 ED8 W-B
WHITE-WHITE 251 70 811 922 ED8 W-W

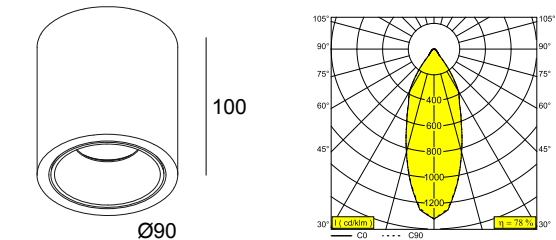

 [View on website](#)

General info		
	LOCATION	indoor-outdoor
	INSTALLATION	Ceiling Surface mounted
	INGRESS PROTECTION	IP53
	PROTECTION AGAINST MECHANICAL IMPACT	IK03
	WEIGHT (KG)	0.6
	ADJUSTABILITY	non adjustable
	INFORMATION	REFLECTOR FL-33° INCL.DIMMABLE LED POWER SUPPLY 500mA-DC

Electrical info		
	ELECTRICAL	220-240V / 50-60Hz
	CLASS	II
	POWER SUPPLY	YES
	DIM TYPE	mains (phase cut-off)
	ENERGY CLASS	D
	CERTIFICATES	CB, EAC, RCM

Lightsource info		
	LIGHTSOURCE NAME	LED
	LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
	TM-30 VALUES	Rf: 89 / Rg: 100
	SDCM	SDCM1
	RISKGROUP	RG1
	LM80	L90B10 > 50000
	LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
	LED TECHNICS (LUMINAIRE)	815lm // 10W // 82lm/W

Accessories	
BOXY HONEYCOMB	
BOXY SOFTENING LENS	
BOXY GLASS SBL	

BOXY R 92733 DIM8 B-MMAT

251 70 811 922 ED8 B-MMAT

For detailed installation instructions, please consult the manual: [251_70_811_XXX_ED8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Control gear, ballast and transformers



36,3 40,4 14

300 90 004 ED8 WIRELESS CONTROL DIM8

☐

Light altering devices



Ø40

251 70 03 01 B BOXY HONEYCOMB B



Ø45 1,5

☐

251 70 03 01 W BOXY HONEYCOMB W

☐



Ø40

251 70 03 04 B BOXY SOFTENING LENS B




Ø45 1,5

☐

251 70 03 04 W BOXY SOFTENING LENS W

☐



Ø40

251 70 03 05 B BOXY GLASS SBL B



Ø45 1,5

☐

251 70 03 05 W BOXY GLASS SBL W

☐



BOXY R 92733 DIM8 B-MMAT

251 70 811 922 ED8 B-MMAT

Notes: