




BOXY R 93033 DIM8 W-W
251 70 811 932 ED8 W-W

AVAILABLE IN
BLACK-BLACK 251 70 811 932 ED8 B-B
BLACK-FLEMISH BRONZE 251 70 811 932 ED8 B-FBR
BLACK-FLEMISH GOLD 251 70 811 932 ED8 B-FG
BLACK-GOLD MATT 251 70 811 932 ED8 B-MMAT
WHITE-BLACK 251 70 811 932 ED8 W-B
WHITE-WHITE 251 70 811 932 ED8 W-W

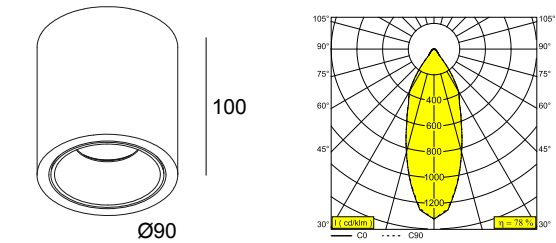

 [View on website](#)

General info	
LOCATION	indoor-outdoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP53
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	0.6
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR FL-33° INCL.DIMMABLE LED POWER SUPPLY 500mA-DC

Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	D
CERTIFICATES	CB, EAC, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1089lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1089lm // 8,6W // 127lm/W
LED TECHNICS (LUMINAIRE)	852lm // 10W // 86lm/W

Accessories	
BOXY HONEYCOMB	
BOXY SOFTENING LENS	
BOXY GLASS SBL	

BOXY R 93033 DIM8 W-W

251 70 811 932 ED8 W-W







For detailed installation instructions, please consult the manual: [251_70_811_XXX_ED8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Miscellaneous control equipment

	300 90 004 ED8 WIRELESS CONTROL DIM8	<input type="checkbox"/>
--	---	--------------------------

Light altering devices

	251 70 03 01 B BOXY HONEYCOMB B	<input type="checkbox"/>
	251 70 03 01 W BOXY HONEYCOMB W	<input type="checkbox"/>
	251 70 03 04 B BOXY SOFTENING LENS B	<input type="checkbox"/>
	251 70 03 04 W BOXY SOFTENING LENS W	<input type="checkbox"/>
	251 70 03 05 B BOXY GLASS SBL B	<input type="checkbox"/>
	251 70 03 05 W BOXY GLASS SBL W	<input type="checkbox"/>



BOXY R 93033 DIM8 W-W

251 70 811 932 ED8 W-W

Notes: