
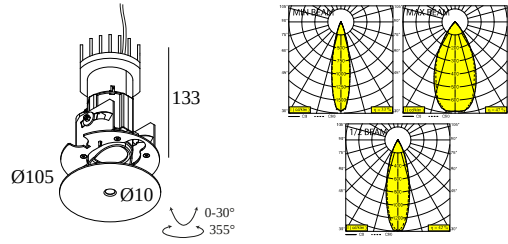


NIME TRIMLESS 927

26411 9200 PRIM

AVAILABLE IN
PRIMER 26411 9200 PRIM

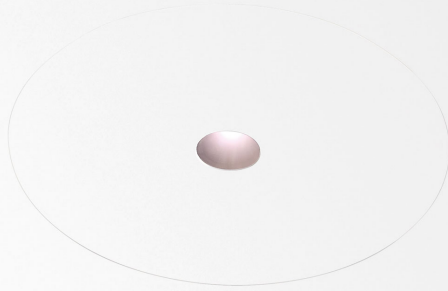

 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	150
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 20°-50° EXCL.LED POWER SUPPLY 900mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-10,7W / CRI>90 (R9: 56) / 2700K / 385-814lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	20°-50°
LED TECHNICS (LIGHT SOURCE)	814lm // 10,7W // 76lm/W
LED TECHNICS (LUMINAIRE)	382lm // 12,3W // 31lm/W

Requirements

MOUNTING KIT NIME O.F.A.
LED POWER SUPPLY 350 / 500 / 700 / 900mA-DC DIM (Remote)













For detailed installation instructions, please consult the manual : [26411_XXX0_HAND.pdf](#)

DELTALIGHT

NIME TRIMLESS 927

26411 9200 PRIM


CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 26410 0010 - MOUNTING KIT NIME O.F.A.	Required
 Plasterboard	 26410 0010 - MOUNTING KIT NIME O.F.A.	Required
 Stucanet	 26410 0010 - MOUNTING KIT NIME O.F.A.	Required
 Concrete + plaster	 26410 0010 - MOUNTING KIT NIME O.F.A.	Required
 Lintel + plaster	 26410 0010 - MOUNTING KIT NIME O.F.A.	Required
 Hollow-core slab + plaster	 26410 0010 - MOUNTING KIT NIME O.F.A.	Required


FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

Dimtype: 1-10V

Cutout dimension (mm): 30

3




300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

Dimtype: DALI

Cutout dimension (mm): 45

3




300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

Dimtype: non-dimmable

Cutout dimension (mm): 30

3



300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

Dimtype: WDL = wireless dimmable


Cutout dimension (mm): 45

3

DELTALIGHT

NIME TRIMLESS 927

26411 9200 PRIM




300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45




300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL

3

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45




300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL

3

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

3 | 3 | 3

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56



300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

6(6) | 6(6) | 6(4) | 5(3)


Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82

DELTALIGHT

NIME TRIMLESS 927

26411 9200 PRIM




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

2->4(3) | 4(2) | 3(1) | 1(1)



Dimtype: 1-10V or push button

Cutout dimension (mm): 72




300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9

3 | 3



Dimtype: 1-10V or DALI or push button




300 90 68 LED POWER SUPPLY MULTI-POWER DIM5

4(3) | 4(2) | 3(1) | -



Dimtype: DALI

Cutout dimension (mm): 72




300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9

2->9(10) | 9(6) | 7(4) | -



Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 84




300 90 92 LED POWER SUPPLY 500mA-DC / 21W

3(1)



Dimtype: non-dimmable

Cutout dimension (mm): 48




300 90 93 LED POWER SUPPLY 700mA-DC / 17W

1(1)



Dimtype: non-dimmable

Cutout dimension (mm): 48




300 90 108 LED POWER SUPPLY 350mA-DC / 8W

1(1)



Dimtype: non-dimmable

Cutout dimension (mm): 40




300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8

2->2



Dimtype: mains (phase cut-off)

Cutout dimension (mm): 42




300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8

3->4



Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55



300 90 118 LED POWER SUPPLY 700mA-DC / 20W DIM8

2->2




Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55

DELTALIGHT

NIME TRIMLESS 927

26411 9200 PRIM




300 90 119 LED POWER SUPPLY 500mA-DC / 11W DIM8

1

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 42




300 90 121 LED POWER SUPPLY 500mA-DC / 20W DIM8

2->3

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55




300 90 123 LED POWER SUPPLY 700mA-DC / 36W DIM8

3

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 50




300 90 124 LED POWER SUPPLY MULTI-POWER DIM7

2->4(3) | 3(2) | 2(1) | 1(1)

Dimtype: 1-10V or push button

Cutout dimension (mm): 55




300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5

4(3) | 3(2) | 2(1) | -

Dimtype: DALI

Cutout dimension (mm): 55




300 90 134 LED POWER SUPPLY MULTI-POWER HV DIM7

2->8(8) | 8(6) | 6(4) | -

Dimtype: 1-10V or push button

Cutout dimension (mm): 84




300 90 135 LED POWER SUPPLY MULTI-POWER HV

5->7 | 4->7 | 4->6 | 3->6 | 3->6

Dimtype: non-dimmable

Cutout dimension (mm): 90




300 90 3112 LED POWER SUPPLY 350mA-DC / 16W DIM8

2->3(3)

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 43




300 90 5120 LED POWER SUPPLY 500mA-DC / 22W DIM8

3->3(3)

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 61



21012 0010 LED POWER SUPPLY MULTI POWER

2->3 | 3 | 3 | -


Dimtype: non-dimmable

Cutout dimension (mm): 50

DELTALIGHT

NIME TRIMLESS 927

26411 9200 PRIM




21012 0021 LED POWER SUPPLY MULTI POWER DIM1

4 | 4 | 4 | -

Dimtype: 1-10V

Cutout dimension (mm): 54




21012 0035 LED POWER SUPPLY MULTI POWER DIM5

4 | 4 | 4 | -

Dimtype: DALI

Cutout dimension (mm): 54




21012 004W LED POWER SUPPLY MULTI-POWER WDL

6(6) | 5(5) | 5(4) | 5(3)

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 84




21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL

4 | 4 | 4 | 3

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 54




21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

2->2

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 50




21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

3->3

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 50




21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

2->2 | 2->2

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55




21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

3->4 | 3->4

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55




21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

3 | 3 | 2 | 1

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 48



21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68

4(3)


Dimtype: non-dimmable

Cutout dimension (mm): 60

DELTALIGHT

NIME TRIMLESS 927

26411 9200 PRIM




21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68

3(1)

Dimtype: non-dimmable

Cutout dimension (mm): 60




21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68

4(2)

Dimtype: non-dimmable

Cutout dimension (mm): 60




21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 30




21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 30



21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 30

Mounting kits



26410 0010 MOUNTING KIT NIME O.F.A.

Cutout dimension (mm): 127

Notes: