




ORBIT LED 930 DIM8 W-W
271 04 93 ED8 W-W

AVAILABLE IN
BLACK-GOLD MATT 271 04 93 ED8 B-MMAT
WHITE-WHITE 271 04 93 ED8 W-W

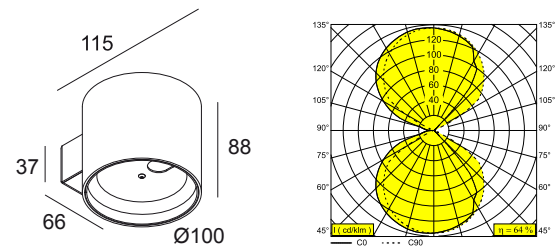

 [View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Wall Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	non adjustable
INFORMATION	INCL.DIMMABLE LED POWER SUPPLY 350mA-DC

Electrical info	
ELECTRICAL	220-240V / 0 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, LM79, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 3,2W / CRI>90 (R9: 52) / 3000K / 309lm)
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	618lm // 6,4W // 98lm/W
LED TECHNICS (LUMINAIRE)	397lm // 7W // 54lm/W


For detailed installation instructions, please consult the manual: [271_04_XX_ED8_HAND.pdf](#)

ORBIT LED 930 DIM8 W-W

271 04 93 ED8 W-W

FINISH YOUR SPECIFICATION

Miscellaneous control equipment



300 90 004 ED8 WIRELESS CONTROL DIM8

☐

Notes: