




UHO L ON 3 92730 B-B
27214 9220 B-B

AVAILABLE IN
BLACK-BLACK 27214 9220 B-B
WHITE-WHITE 27214 9220 W-W

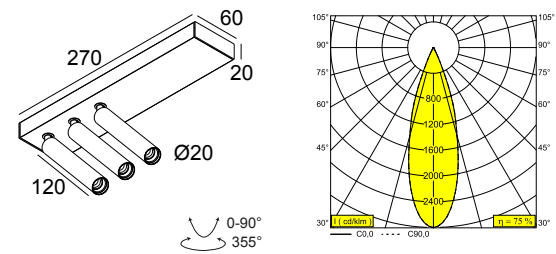

 [View on website](#)

General info

| | |
|--------------------|--------------------------------------------------------------------------------------------|
| LOCATION | indoor |
| INSTALLATION | Ceiling Surface mounted |
| INGRESS PROTECTION | IP20 |
| WEIGHT (KG) | 0.8 |
| ADJUSTABILITY | 0° to 90° swiveling, 355° rotatable |
| INFORMATION | REFLECTOR FL-30° INCL.LED POWER SUPPLY 24V-DC + CONVERTER 1000mA UHO TUBE B included |

Electrical info

| | |
|--------------|--------------------|
| ELECTRICAL | 220-240V / 50-60Hz |
| CLASS | II |
| POWER SUPPLY | YES |
| DIM TYPE | non-dimmable |
| ENERGY CLASS | E |
| CERTIFICATES | CB, ENEC, RCM |

Lightsource info

| | |
|-----------------------------|----------------------------------------------------------|
| LIGHTSOURCE NAME | LED |
| LIGHTSOURCE | 3 x (LED cluster 2,9W / CRI>90 (R9: 55) / 2700K / 294lm) |
| TM-30 VALUES | Rf: 91 / Rg: 99 |
| SDCM | SDCM3 |
| RISKGROUP | RG2 |
| LM80 | L90B10 > 150000 |
| LED TECHNICS (LIGHT SOURCE) | 882lm // 8,7W // 100lm/W |
| LED TECHNICS (LUMINAIRE) | 665lm // 10W // 66lm/W |

For detailed installation instructions, please consult the manual: [27214_XXX0_HAND.pdf](#)



UHO L ON 3 92730 B-B

27214 9220 B-B

Notes: