




LOGIC MINI W R W
304 30 12 W

AVAILABLE IN
ALU GREY 304 30 12 A
BLACK 304 30 12 B
FLEMISH BRONZE OUTDOOR 304 30 12 FBRX
ANTHRACITE (DARK GREY) 304 30 12 N
WHITE 304 30 12 W

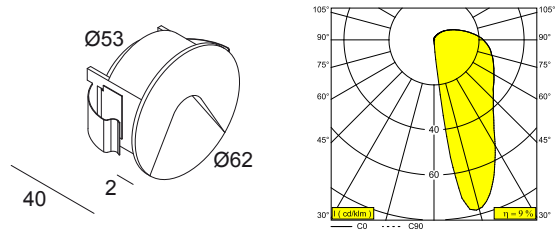

 [View on website](#)

General info	
LOCATION	indoor-outdoor
INSTALLATION	Wall Recessed
CUTOUT SHAPE/SIZE (MM)	round - 55
RECESSED DEPTH (MM)	50
THICKNESS OF MOUNTING SURFACE (MM)	min.12
INGRESS PROTECTION	IP54
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	EXCL.LED POWER SUPPLY 24V-DC

Electrical info	
ELECTRICAL	24V-DC
CLASS	III
DIM TYPE	non-dimmable
ENERGY CLASS	G

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 0,6W / 3000K / 40lm
LED TECHNICS (LIGHT SOURCE)	40lm // 0,6W // 67lm/W
LED TECHNICS (LUMINAIRE)	4lm // 1W // 5lm/W

Requirements	
LED POWER SUPPLY 24V-DC	

Options	
CONCRETE BOX 188	


LOGIC MINI W R W

304 30 12 W

For detailed installation instructions, please consult the manual: [304_30_12_HAND.pdf](#)


FINISH YOUR SPECIFICATION

LED power supplies #



300 89 24 150 LED POWER SUPPLY 24V-DC / 150W


225 ☐



21012 0160 LED POWER SUPPLY 24V-DC / 24W

36 ☐

Concrete boxes



270 11 188 CONCRETE BOX 188

☐

Notes: