




LOGIC MINI W S A

304 31 12 A

AVAILABLE IN  
**ALU GREY** 304 31 12 A  
**BLACK** 304 31 12 B  
**FLEMISH BRONZE OUTDOOR** 304 31 12 FBRX  
**ANTHRACITE (DARK GREY)** 304 31 12 N  
**WHITE** 304 31 12 W

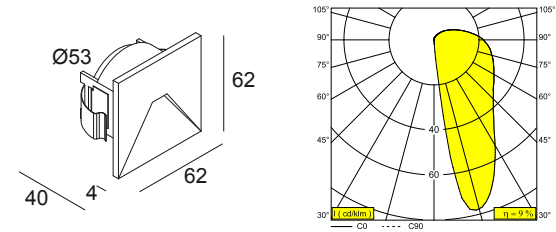

[View on website](#)

General info	
LOCATION	indoor-outdoor
INSTALLATION	Wall Recessed
CUTOUT SHAPE/SIZE (MM)	round - 55
RECESSED DEPTH (MM)	50
THICKNESS OF MOUNTING SURFACE (MM)	min.12
INGRESS PROTECTION	IP54
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	EXCL.LED POWER SUPPLY 24V-DC

Electrical info	
ELECTRICAL	24V-DC
CLASS	III
DIM TYPE	non-dimmable
ENERGY CLASS	G

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 0,6W / 3000K / 40lm
LED TECHNICS (LIGHT SOURCE)	40lm // 0,6W // 67lm/W
LED TECHNICS (LUMINAIRE)	4lm // 1W // 5lm/W


Requirements	
LED POWER SUPPLY 24V-DC	

Options	
CONCRETE BOX 188	

For detailed installation instructions, please consult the manual: [304\\_30\\_12\\_HAND.pdf](#)


FINISH YOUR SPECIFICATION

LED power supplies #



**300 89 24 150** LED POWER SUPPLY 24V-DC / 150W


225 ☐



**21012 0160** LED POWER SUPPLY 24V-DC / 24W

36 ☐

Concrete boxes



**270 11 188** CONCRETE BOX 188

☐

Notes: