




OBIN ON 92724 DIM5 B
30511 9225 B

AVAILABLE IN
BLACK 30511 9225 B
BRUSHED ALU 30511 9225 BRA
BRUSHED ANTHRACITE 30511 9225 BRAT
BRUSHED GOLD 30511 9225 BRG
BRUSHED OLD BRONZE 30511 9225 BROB
WHITE 30511 9225 W

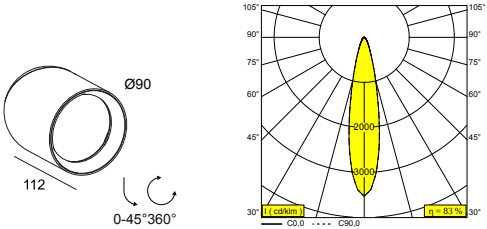

 [View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 45° swiveling, 360° rotatable
INFORMATION	LENS FL-24° INCL.DIMMABLE POWER SUPPLY

Electrical info	
ELECTRICAL	120-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	E

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6W / CRI>90 (R9: 60) / 2700K / 1458lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1458lm // 11,6W // 125lm/W
LED TECHNICS (LUMINAIRE)	1217lm // 13W // 91lm/W

Requirements
SPY 90 TUBE

Accessories
HONEYCOMB 75


OBIN ON 92724 DIM5 B

30511 9225 B

For detailed installation instructions, please consult the manual: [30511_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Light altering devices



19810 0110 B HONEYCOMB 75 SINGLE USE B

☐

Finish your product



19810 0170 B SPY 90 TUBE B

☐

19810 0170 DC SPY 90 TUBE DC

☐

19810 0170 FBR SPY 90 TUBE FBR

☐

19810 0170 FG SPY 90 TUBE FG

☐

19810 0170 GC SPY 90 TUBE GC

☐

19810 0170 W SPY 90 TUBE W

☐

Notes: