




M52 - 2 LED D 92733 MDL  
421 228 812 922 D MDL



 [View on website](#)

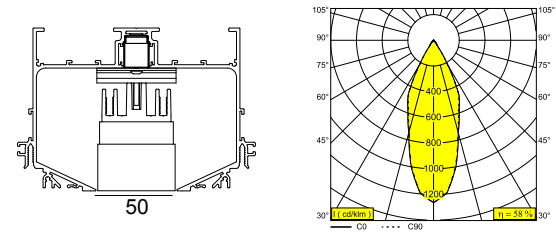

General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	non adjustable
INFORMATION	2 x REFLECTOR FL-33° EXCLED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	D
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm)
TM-30 VALUES	Rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1506lm // 11,6W // 129lm/W
LED TECHNICS (LUMINAIRE)	875lm // 13W // 66lm/W

Requirements	
LED POWER SUPPLY 48V-DC	

Options	
DIMMABLE MODULATOR	



## **M52 - 2 LED D 92733 MDL**

421 228 812 922 D MDL

For detailed installation instructions, please consult the manual: [421\\_228\\_812\\_XXX\\_D\\_MDL\\_HAND.pdf](#)

M52 - 2 LED D 92733 MDL

421 228 812 922 D MDL

FINISH YOUR SPECIFICATION

Current supply #



**21032 0030** SMART 48 MODULATOR PLUG-IN WD

12 ☐

SMART 48 #



**300 90 011** SMART 48 MODULATOR DIM9


12 ☐



**300 90 012** SMART 48 MODULATOR WD


12 ☐

LED power supplies #



**300 89 48 100** LED POWER SUPPLY 48V-DC / 100W DIN

6 ☐



**300 89 48 240** LED POWER SUPPLY 48V-DC / 240W DIN

14 ☐



**21012 0230** LED POWER SUPPLY 48V-DC / 100W

6 ☐











**21012 0240** LED POWER SUPPLY 48V-DC / 200W

12 ☐

M52 - 2 LED D 92733 MDL

421 228 812 922 D MDL

COMPATIBLE COMPOSABLES

SPLITLINE M52 profile		Available Colours
	<b>420 52 10 00</b> SPM52 - PROFILE 1m	
	<b>420 52 20 00</b> SPM52 - PROFILE 2m	
	<b>420 52 30 00</b> SPM52 - PROFILE 3m	
	<b>24413 0000</b> SPM52 - PROFILE	

Notes: