




**DOT.COM L2 ON 92732 DIM8 W-B**  
 424 113 02 922 ED8 W-B

AVAILABLE IN  
**BLACK-BLACK** 424 113 02 922 ED8 B-B  
**WHITE-BLACK** 424 113 02 922 ED8 W-B

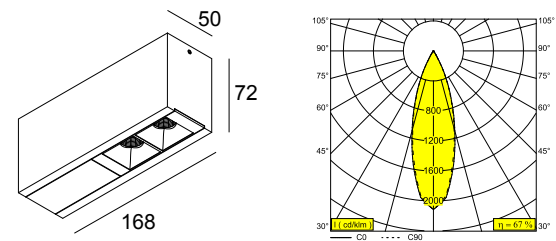


[View on website](#)

**General info**

<b>LOCATION</b>	indoor
<b>INSTALLATION</b>	Ceiling Surface mounted
<b>INGRESS PROTECTION</b>	IP20
<b>WEIGHT (KG)</b>	0.7
<b>ADJUSTABILITY</b>	non adjustable
<b>INFORMATION</b>	2 x REFLECTOR FL-32° INCL.DIMMABLE LED POWER SUPPLY 700mA-DC

**Electrical info**

<b>ELECTRICAL</b>	230V / 50-60Hz
<b>CLASS</b>	I
<b>POWER SUPPLY</b>	YES
<b>DIM TYPE</b>	mains (phase cut-off)
<b>ENERGY CLASS</b>	E
<b>CERTIFICATES</b>	EAC, ENEC, RCM

**Lightsource info**

<b>LIGHTSOURCE NAME</b>	LED
<b>LIGHTSOURCE</b>	LED cluster 4,1W / CRI>90 (R9: 50) / 2700K / 425lm
<b>TM-30 VALUES</b>	Rf: 92 / Rg: 100
<b>SDCM</b>	SDCM3
<b>RISKGROUP</b>	RG2
<b>LM80</b>	L80 > 60000
<b>LED TECHNICS (LIGHT SOURCE)</b>	425lm // 4,1W // 104lm/W
<b>LED TECHNICS (LUMINAIRE)</b>	286lm // 5W // 61lm/W

For detailed installation instructions, please consult the manual: [424 113 02 XXX HAND.pdf](#)



## **DOT.COM L2 ON 92732 DIM8 W-B**

424 113 02 922 ED8 W-B

Notes: