



# DELTALIGHT

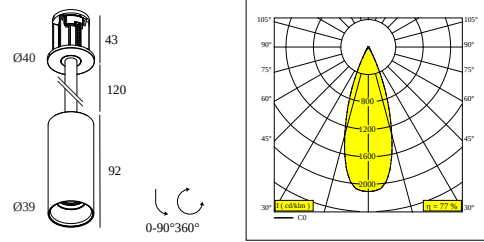




## SPY II 39 JACK ROD 120 MM CRI90 3000K 35° EX PS

12304721EP02-9030W1-0704040404-0000



 Image shows default finishes. Refer to the specifications below for the selected finishes per part.

### Selected finishes per part



[View on website](#)

General info	
<b>LOCATION</b>	indoor
<b>INSTALLATION</b>	Ceiling Suspended
<b>CUTOUT SHAPE/SIZE (MM)</b>	round - 31mm
<b>RECESSED DEPTH (MM)</b>	45mm
<b>THICKNESS OF MOUNTING SURFACE (MM)</b>	min. 9mm - max. 30mm
<b>INGRESS PROTECTION</b>	IP20
<b>WEIGHT (KG)</b>	0.2
<b>ADJUSTABILITY</b>	0° to 90° swiveling, 360° rotatable
<b>INFORMATION</b>	Excl. LED power supply 350mA/500mA
Electrical info	
<b>CLASS</b>	III
<b>DIM TYPE</b>	depending on power supply
<b>ENERGY CLASS</b>	E
Lightsource info	
<b>LIGHTSOURCE NAME</b>	LED
<b>LIGHTSOURCE</b>	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1018lm
<b>TM-30 VALUES</b>	rf: 90 / Rg: 99
<b>SDCM</b>	SDCM1
<b>RISKGROUP</b>	RG1
<b>LM80</b>	L90B10 > 50000
<b>BEAMANGLE</b>	35°
<b>LED TECHNICS (LIGHT SOURCE)</b>	1018lm // 8,6W // 118lm/W
<b>LED TECHNICS (LUMINAIRE)</b>	770lm // 9,9W // 78lm/W

# DELTALIGHT

## SPY II 39 JACK ROD 120 MM CRI90 3000K 35° EX PS

12304721EP02-9030W1-0704040404-0000

### Requirements

Remote power supply 350mA/500mA


### Accessories

SOFTENING LENS 39  
SANDBLASTED LENS 39  
LINEAR SPREAD LENS 39  
HONEYCOMB 39

## CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Stretched ceiling	-

## ACCESSORIES

LED power supplies	# of Fixtures
	Min current   Max current
<p> # of fixtures indicates how many devices can be connected (min -&gt; max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.</p>	





**21012 0595** LED POWER SUPPLY 500mA-DC 10W DIM5

Dimtype : DALI

Cutout dimension (mm) : 35

- | 1 -> 1

### Light altering devices

	<b>32210 0210</b> SOFTENING LENS 39	<input type="checkbox"/>
	<b>32210 0220</b> SANDBLASTED LENS 39	<input type="checkbox"/>

# DELTALIGHT

## SPY II 39 JACK ROD 120 MM CRI90 3000K 35° EX PS

12304721EP02-9030W1-0704040404-0000



**32210 0230** LINEAR SPREAD LENS 39



**32210 0240** HONEYCOMB 39



Notes: