




DELTALIGHT


SPY II 39 M CABLE CRI90 2700K 19° MDL

12306621MD00-9027S7-10290404-0000



 Image shows default finishes. Refer to the specifications below for the selected finishes per part.

Selected finishes per part

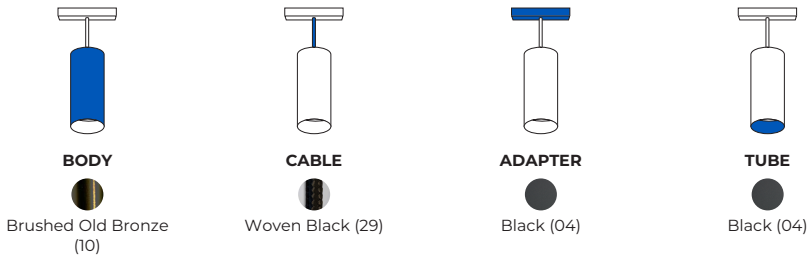

[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4

Electrical info

ELECTRICAL	48V-DC
CLASS	II
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 974lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	19°
LED TECHNICS (LIGHT SOURCE)	974lm // 8,6W // 113lm/W
LED TECHNICS (LUMINAIRE)	676lm // 9,9W // 68lm/W

Accessories

SOFTENING LENS 39
SANDBLASTED LENS 39
LINEAR SPREAD LENS 39

DELTALIGHT

SPY II 39 M CABLE CRI90 2700K 19° MDL

12306621MD00-9027S7-10290404-0000

HONEYCOMB 39

ACCESSORIES

Light altering devices



32210 0210 SOFTENING LENS 39



32210 0220 SANDBLASTED LENS 39



32210 0230 LINEAR SPREAD LENS 39



32210 0240 HONEYCOMB 39



COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL



30411 9205 SHIFTLINE M26H + SBL 2m 927 DIM5



30411 9305 SHIFTLINE M26H + SBL 2m 930 DIM5



30412 9205 SHIFTLINE M26H + SBL 3m 927 DIM5




30412 9305 SHIFTLINE M26H + SBL 3m 930 DIM5




DELTALIGHT

SPY II 39 M CABLE CRI90 2700K 19° MDL

12306621MD00-9027S7-10290404-0000




30413 9205 SHIFTLINE M26H + SBL 4m 927 DIM5




30413 9305 SHIFTLINE M26H + SBL 4m 930 DIM5




SHIFTLINE M26H profile



23359 0010 SLM26H - PROFILE 1m




23359 0020 SLM26H - PROFILE 2m




23359 0030 SLM26H - PROFILE 3m




SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)



23358 0010 SLM26L - PROFILE 1m



23358 0020 SLM26L - PROFILE 2m



23358 0030 SLM26L - PROFILE 3m



SPLITLINE M20 ST profile



23397 0020 SPM20 ST - PROFILE 2m



DELTALIGHT

SPY II 39 M CABLE CRI90 2700K 19° MDL


12306621MD00-9027S7-10290404-0000




23397 0030 SPM20 ST - PROFILE 3m




SPLITLINE M20 profile



420 20 10 00 SPM20 - PROFILE 1m




420 20 20 00 SPM20 - PROFILE 2m




420 20 30 00 SPM20 - PROFILE 3m




SPLITLINE M52 profile



420 52 10 00 SPM52 - PROFILE 1m



420 52 20 00 SPM52 - PROFILE 2m



420 52 30 00 SPM52 - PROFILE 3m



Notes: