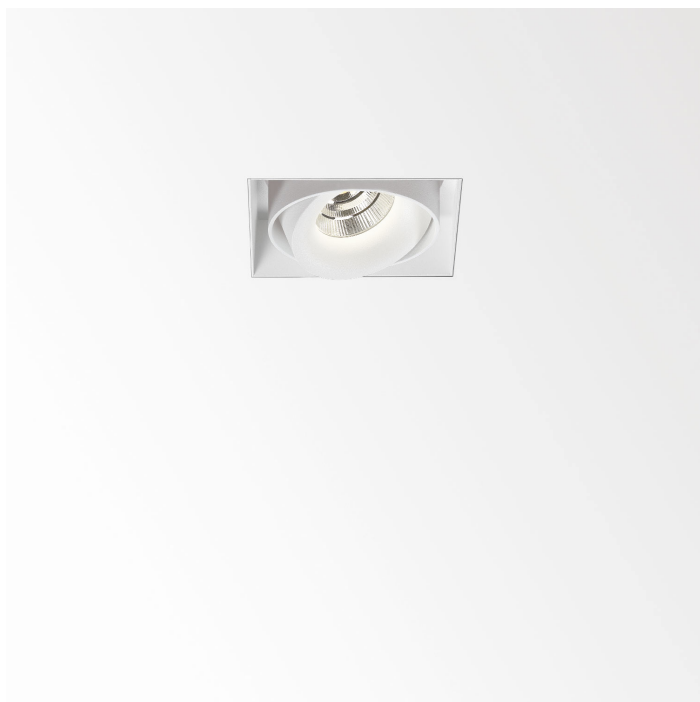




## MINIGRID IN TRIMLESS 1 93050

100009 9330 W-W


AVAILABLE IN

**BLACK-BLACK** 100009 9330 B-B

**BLACK-WHITE** 100009 9330 B-W

**WHITE-BLACK** 100009 9330 W-B

**WHITE-WHITE** 100009 9330 W-W



[View on website](#)



### General info

|                               |                                                        |
|-------------------------------|--------------------------------------------------------|
| <b>LOCATION</b>               | indoor                                                 |
| <b>INSTALLATION</b>           | Ceiling Recessed                                       |
| <b>CUTOUT SHAPE/SIZE (MM)</b> | rectangle - KIT                                        |
| <b>RECESSED DEPTH (MM)</b>    | 85                                                     |
| <b>INGRESS PROTECTION</b>     | IP20                                                   |
| <b>WEIGHT (KG)</b>            | 0.5                                                    |
| <b>ADJUSTABILITY</b>          | 0° to 20° swiveling, 350° rotatable                    |
| <b>INFORMATION</b>            | REFLECTOR FL-50°<br>EXCL.LED POWER SUPPLY 350-500mA-DC |

### Electrical info

|                     |                           |
|---------------------|---------------------------|
| <b>CLASS</b>        | III                       |
| <b>DIM TYPE</b>     | depending on power supply |
| <b>ENERGY CLASS</b> | E                         |
| <b>CERTIFICATES</b> | CB, ENEC                  |

### Lightsource info

|                                    |                                                           |
|------------------------------------|-----------------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                       |
| <b>LIGHTSOURCE</b>                 | LED array 5,8-8,6W / CRI>90 (R9: 52) / 3000K / 787-1089lm |
| <b>TM-30 VALUES</b>                | rf: 90 / Rg: 99                                           |
| <b>SDCM</b>                        | SDCM1                                                     |
| <b>RISKGROUP</b>                   | RG1                                                       |
| <b>LM80</b>                        | L90B10 > 50000                                            |
| <b>BEAMANGLE</b>                   | 50°                                                       |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 1089lm // 8,6W // 127lm/W                                 |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 876lm // 9,9W // 89lm/W                                   |

### Requirements

MINIGRID IN 1 MOUNTING KIT  
 MINIGRID IN 1 MOUNTING KIT LARGE  
 CONCRETE PACK MGIT 1  
 LED POWER SUPPLY 350 / 500mA-DC DIM (Remote)

For detailed installation instructions, please consult the manual : [100009\\_XXX0\\_HAND.pdf](#)

# DELTALIGHT

## MINIGRID IN TRIMLESS 1 93050

100009 9330 W-W

### CEILING COMPATIBILITY

| Ceiling Type                                                                                                         | Mounting Kit                                                                                                                         |          |
|----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|----------|
|  <b>System ceiling</b>               |  202 71 95 01 - MINIGRID IN 1 MOUNTING KIT          | Required |
|  <b>Plasterboard</b>                 |  202 71 95 01 - MINIGRID IN 1 MOUNTING KIT          | Required |
|  <b>Stucanet</b>                     |  202 71 95 01 - MINIGRID IN 1 MOUNTING KIT          | Required |
|                                                                                                                      |  202 71 95 01L - MINIGRID IN 1 MOUNTING KIT LARGE   | Required |
|  <b>Concrete</b>                     |  202 71 96 01 - CONCRETE PACK MGIT 1                | Required |
|  <b>Concrete + plaster</b>           |  202 71 95 01L - MINIGRID IN 1 MOUNTING KIT LARGE   | Required |
|  <b>Lintel + plaster</b>            |  202 71 95 01L - MINIGRID IN 1 MOUNTING KIT LARGE   | Required |
|  <b>Hollow-core slab</b>           |  202 71 96 01 - CONCRETE PACK MGIT 1              | Required |
|  <b>Hollow-core slab + plaster</b> |  202 71 95 01L - MINIGRID IN 1 MOUNTING KIT LARGE | Required |
|  <b>Stretched ceiling</b>          |  15212 0120 - MOUNTING KIT MINIGRID IN 1 CSC      | Required |

### FINISH YOUR SPECIFICATION

#### LED power supplies

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




**300 48 350 ED1** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

Dimtype: 1-10V

Cutout dimension (mm): 30

1



**300 48 350 ED5** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

Dimtype: DALI

Cutout dimension (mm): 45

1











MINIGRID IN TRIMLESS 1 93050

100009 9330 W-W

|                                                                                    |                                                                          |             |                          |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------|--------------------------|
|    | <b>300 48 350 MDL</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL  | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                    |             |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |             |                          |
|    | <b>300 48 350 WDL</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL  | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                         |             |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |             |                          |
|    | <b>300 48 500 ED1</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V                                                           |             |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |             |                          |
|    | <b>300 48 500 ED5</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                            |             |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |             |                          |
|  | <b>300 48 500 MDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL  | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                    |             |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |             |                          |
|  | <b>300 48 500 WDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL  | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                         |             |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |             |                          |
|  | <b>300 90 61</b> LED POWER SUPPLY MULTI-POWER DIM6                       | 2   2       | <input type="checkbox"/> |
|                                                                                    | Dimtype: mains (phase cut-off) or push button                            |             |                          |
|                                                                                    | Cutout dimension (mm): 56                                                |             |                          |
|  | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9                       | 4(4)   4(4) | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or DALI or push button                                    |             |                          |
|                                                                                    | Cutout dimension (mm): 82                                                |             |                          |
|  | <b>300 90 64</b> LED POWER SUPPLY MULTI-POWER DIM7                       | 2(1)   2(1) | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or push button                                            |             |                          |
|                                                                                    | Cutout dimension (mm): 72                                                |             |                          |
|  | <b>300 90 67</b> LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9    | 2           | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or DALI or push button                                    |             |                          |

MINIGRID IN TRIMLESS 1 93050





100009 9330 W-W

|                                                                                    |                                                                                                                                         |                |                          |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------------------|
|    | <b>300 90 68</b><br>LED POWER SUPPLY MULTI-POWER DIM5<br><br>Dimtype: DALI<br>Cutout dimension (mm): 72                                 | 2(2)   2(1)    | <input type="checkbox"/> |
|    | <b>300 90 69</b><br>LED POWER SUPPLY MULTI-POWER HV DIM9<br><br>Dimtype: 1-10V or DALI or push button<br>Cutout dimension (mm): 84      | 2->6(6)   6(4) | <input type="checkbox"/> |
|    | <b>300 90 124</b><br>LED POWER SUPPLY MULTI-POWER DIM7<br><br>Dimtype: 1-10V or push button<br>Cutout dimension (mm): 55                | 3(2)   2(1)    | <input type="checkbox"/> |
|    | <b>300 90 125</b><br>LED POWER SUPPLY MULTI-POWER MINI DIM5<br><br>Dimtype: DALI<br>Cutout dimension (mm): 55                           | 2(2)   2(1)    | <input type="checkbox"/> |
|  | <b>300 90 135</b><br>LED POWER SUPPLY MULTI-POWER HV<br><br>Dimtype: non-dimmable<br>Cutout dimension (mm): 90                          | 3->3   2->3    | <input type="checkbox"/> |
|  | <b>21012 004W</b><br>LED POWER SUPPLY MULTI-POWER WDL<br><br>Dimtype: WDL = wireless dimmable<br>Cutout dimension (mm): 84              | 3(3)   3(3)    | <input type="checkbox"/> |
|  | <b>21012 005W</b><br>LED POWER SUPPLY MULTI-POWER COMPACT WDL<br><br>Dimtype: WDL = wireless dimmable<br>Cutout dimension (mm): 54      | 3   3          | <input type="checkbox"/> |
|  | <b>21012 0258</b><br>LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8<br><br>Dimtype: mains (phase cut-off)<br>Cutout dimension (mm): 50 | 1              | <input type="checkbox"/> |
|  | <b>21012 0278</b><br>LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8<br><br>Dimtype: mains (phase cut-off)<br>Cutout dimension (mm): 55 | 1              | <input type="checkbox"/> |
|  | <b>21012 0288</b><br>LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8<br><br>Dimtype: mains (phase cut-off)<br>Cutout dimension (mm): 55 | 2->3           | <input type="checkbox"/> |


# DELTALIGHT

## MINIGRID IN TRIMLESS 1 93050


100009 9330 W-W

|                                                                                    |                                                                      |      |                          |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|------|--------------------------|
|    | <b>21012 0298</b> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8    | 2    | <input type="checkbox"/> |
| <b>Dimtype:</b> mains (phase cut-off)                                              |                                                                      |      |                          |
| <b>Cutout dimension (mm):</b> 48                                                   |                                                                      |      |                          |
|   | <b>21012 0480</b> LED POWER SUPPLY 350mA-DC / 17W IP68               | 2(2) | <input type="checkbox"/> |
| <b>Dimtype:</b> non-dimmable                                                       |                                                                      |      |                          |
| <b>Cutout dimension (mm):</b> 60                                                   |                                                                      |      |                          |
|   | <b>21012 0500</b> LED POWER SUPPLY 500mA-DC / 24W IP68               | 2(1) | <input type="checkbox"/> |
| <b>Dimtype:</b> non-dimmable                                                       |                                                                      |      |                          |
| <b>Cutout dimension (mm):</b> 60                                                   |                                                                      |      |                          |
|    | <b>21032 0295</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 | 2    | <input type="checkbox"/> |
| <b>Dimtype:</b> DALI                                                               |                                                                      |      |                          |
| <b>Cutout dimension (mm):</b> 30                                                   |                                                                      |      |                          |
|  | <b>21032 0305</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 2    | <input type="checkbox"/> |
| <b>Dimtype:</b> DALI                                                               |                                                                      |      |                          |
| <b>Cutout dimension (mm):</b> 30                                                   |                                                                      |      |                          |

### Concrete packs

|                                                                                    |                                          |                          |
|------------------------------------------------------------------------------------|------------------------------------------|--------------------------|
|  | <b>202 71 96 01</b> CONCRETE PACK MGIT 1 | <input type="checkbox"/> |
| <b>Cutout dimension (mm):</b> 160 x 160                                            |                                          |                          |

### Mounting kits

|                                                                                    |                                                       |                          |
|------------------------------------------------------------------------------------|-------------------------------------------------------|--------------------------|
|  | <b>202 71 95 01</b> MINIGRID IN 1 MOUNTING KIT        | <input type="checkbox"/> |
| <b>Cutout dimension (mm):</b> 130 x 130                                            |                                                       |                          |
|  | <b>202 71 95 01L</b> MINIGRID IN 1 MOUNTING KIT LARGE | <input type="checkbox"/> |
| <b>Cutout dimension (mm):</b> 200                                                  |                                                       |                          |

# DELTALIGHT

## MINIGRID IN TRIMLESS 1 93050

100009 9330 W-W

### Mounting kits stretched ceiling

---



**15212 0120** MOUNTING KIT MINIGRID IN 1 CSC



Notes: