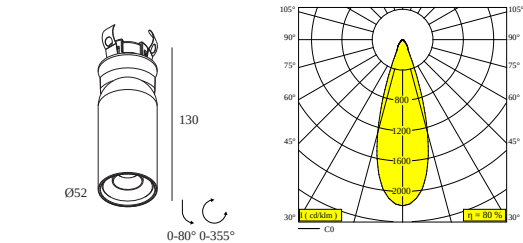




LUNELLE 52 CLIP 93030

32812 9320 BRA

AVAILABLE IN  
**BRUSHED ALU** 32812 9320 BRA  
**BRUSHED ANTHRACITE** 32812 9320 BRAT  
**BRUSHED BROWN BRONZE** 32812 9320 BRBB  
**BRUSHED COPPER** 32812 9320 BRCU  
**BRUSHED GOLD** 32812 9320 BRG  
**BRUSHED OLD BRONZE** 32812 9320 BROB



 [View on website](#)



| General info                       |                       |
|------------------------------------|-----------------------|
| LOCATION                           | indoor                |
| INSTALLATION                       | Ceiling Semi-recessed |
| CUTOUT SHAPE/SIZE (MM)             | round - 40            |
| RECESSED DEPTH (MM)                | 40                    |
| THICKNESS OF MOUNTING SURFACE (MM) | 12                    |
| INGRESS PROTECTION                 | IP20                  |
| WEIGHT (KG)                        | 0.3                   |

| Electrical info |                           |
|-----------------|---------------------------|
| CLASS           | III                       |
| DIM TYPE        | depending on power supply |
| ENERGY CLASS    | F                         |

| Lightsource info            |                                   |
|-----------------------------|-----------------------------------|
| LIGHTSOURCE NAME            | LED                               |
| LIGHTSOURCE                 | LED 5,6W / CRI>90 / 3000K / 519lm |
| SDCM                        | SDCM3                             |
| RISKGROUP                   | RG2                               |
| BEAMANGLE                   | 30°                               |
| LED TECHNICS (LIGHT SOURCE) | 519lm // 5,6W // 92lm/W           |
| LED TECHNICS (LUMINAIRE)    | 415lm // 6,4W // 64lm/W           |

| Requirements              |  |
|---------------------------|--|
| LED POWER SUPPLY 500mA-DC |  |



| Accessories |  |
|-------------|--|
| VISOR 52    |  |

For detailed installation instructions, please consult the manual : [32812\\_XXX0\\_HAND.pdf](#)

CEILING COMPATIBILITY







| Ceiling Type                                                                                                  | Mounting Kit |
|---------------------------------------------------------------------------------------------------------------|--------------|
|  Plasterboard                 | -            |
|  Stucanet                     | -            |
|  Wood                         | -            |
|  Concrete                     | -            |
|  Concrete + plaster           | -            |
|  Lintel + plaster            | -            |
|  Hollow-core slab           | -            |
|  Hollow-core slab + plaster | -            |
|  Stretched ceiling          | -            |

FINISH YOUR SPECIFICATION


| LED power supplies                                                                                                                                                                                                                                                                                                                                                 | # of Fixtures                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| <div><div> # of fixtures indicates how many devices can be connected (min -&gt; max) to the power supply. The values before and after the '!' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.</div></div> |                                                   |
| <div><div></div><div><div>300 90 63</div><div>LED POWER SUPPLY MULTI-POWER DIM9</div><div>Dimtype: 1-10V or DALI or push button</div><div>Cutout dimension (mm): 82</div></div></div>                                                                                            | <div>1 -&gt; 6 (6) <input type="checkbox"/></div> |
| <div><div></div><div><div>300 90 68</div><div>LED POWER SUPPLY MULTI-POWER DIM5</div><div>Dimtype: DALI</div><div>Cutout dimension (mm): 72</div></div></div>                                                                                                                    | <div>1 -&gt; 4 (2) <input type="checkbox"/></div> |

## LUNELLE 52 CLIP 93030

32812 9320 BRA

|                                                                                    |                                                                   |             |                          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------|-------------|--------------------------|
|    | <b>300 90 69</b> LED POWER SUPPLY MULTI-POWER HV DIM9             | 1 -> 10 (7) | <input type="checkbox"/> |
| <b>Dimtype:</b> 1-10V or DALI or push button                                       |                                                                   |             |                          |
| <b>Cutout dimension (mm):</b> 84                                                   |                                                                   |             |                          |
|    | <b>300 90 124</b> LED POWER SUPPLY MULTI-POWER DIM7               | 1 -> 3 (2)  | <input type="checkbox"/> |
| <b>Dimtype:</b> 1-10V or push button                                               |                                                                   |             |                          |
| <b>Cutout dimension (mm):</b> 55                                                   |                                                                   |             |                          |
|    | <b>300 90 125</b> LED POWER SUPPLY MULTI-POWER MINI DIM5          | 1 -> 3 (2)  | <input type="checkbox"/> |
| <b>Dimtype:</b> DALI                                                               |                                                                   |             |                          |
| <b>Cutout dimension (mm):</b> 55                                                   |                                                                   |             |                          |
|    | <b>21012 005W</b> LED POWER SUPPLY MULTI-POWER COMPACT WDL        | 1 -> 4      | <input type="checkbox"/> |
| <b>Dimtype:</b> WDL = wireless dimmable                                            |                                                                   |             |                          |
| <b>Cutout dimension (mm):</b> 54                                                   |                                                                   |             |                          |
|  | <b>21012 0298</b> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 | 1 -> 3      | <input type="checkbox"/> |
| <b>Dimtype:</b> mains (phase cut-off)                                              |                                                                   |             |                          |
| <b>Cutout dimension (mm):</b> 48                                                   |                                                                   |             |                          |
|  | <b>21012 0595</b> LED POWER SUPPLY 500mA-DC 10W DIM5              | 1 -> 1      | <input type="checkbox"/> |
| <b>Dimtype:</b> DALI                                                               |                                                                   |             |                          |
| <b>Cutout dimension (mm):</b> 35                                                   |                                                                   |             |                          |

### Light altering devices

|                                                                                    |                                  |                          |
|------------------------------------------------------------------------------------|----------------------------------|--------------------------|
|  | <b>32810 0010 DC</b> VISOR 52 DC | <input type="checkbox"/> |
|------------------------------------------------------------------------------------|----------------------------------|--------------------------|

Notes: