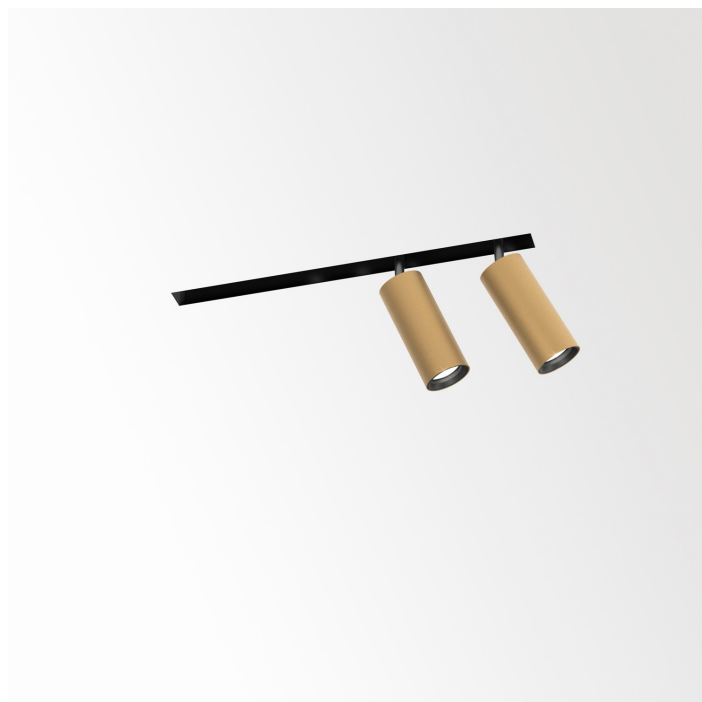




SPM20 - SPY 392 AIR 92740

29813 9230 FG

AVAILABLE IN



BLACK 29813 9230 B

FLEMISH BRONZE 29813 9230 FBR

FLEMISH GOLD 29813 9230 FG

GOLD COLOURED 29813 9230 GC

WHITE 29813 9230 W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - KIT
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-40° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 753-1041lm)
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	2082lm // 17,2W // 121lm/W
LED TECHNICS (LUMINAIRE)	1688lm // 19,8W // 85lm/W

Requirements

SPM20 - AIR KIT 1

SPY 39 TUBE or VISOR 39

LED POWER SUPPLY 350 / 500mA-DC DIM

For detailed installation instructions, please consult the manual : [29813_XXX0_HAND.pdf](#)

SPM20 - SPY 392 AIR 92740


29813 9230 FG

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
	 29810 1010 - SPM20 - AIR KIT 1 Required






FINISH YOUR SPECIFICATION

AIR kit for M20

	29810 1010 SPM20 - AIR KIT 1 ☐
Cutout dimension (mm): 50 x 310	





LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.			Min current Max current	
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	1	☐	
Dimtype: 1-10V				
Cutout dimension (mm): 30				
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐	
Dimtype: DALI				
Cutout dimension (mm): 45				
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	1	☐	
Dimtype: non-dimmable				
Cutout dimension (mm): 30				
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	1	☐	
Dimtype: WDL = wireless dimmable				
Cutout dimension (mm): 45				
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1	1	☐	
Dimtype: 1-10V				
Cutout dimension (mm): 30				




SPM20 - SPY 392 AIR 92740

29813 9230 FG

	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	1	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	1	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	1 1	☐
	Dimtype: mains (phase cut-off) or push button		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	2(2) 2(2)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	1(1) 1(1/2)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 72		
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	1 -	☐
	Dimtype: 1-10V or DALI or push button		
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1(1) 1(1/2)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 72		
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3(3) 3(2)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 84		
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1(1) 1(1/2)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 55		

SPM20 - SPY 392 AIR 92740


29813 9230 FG

	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	1(1) 1(1/2) ☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	2 2 ☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	1 1 ☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	1 1 ☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	1 1 ☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	2(2) 1(1) ☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	1 1 ☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	1 - ☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1/2 ☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1 ☐

DELTALIGHT

SPM20 - SPY 392 AIR 92740

29813 9230 FG

	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1 1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 48			
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8	1/2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 40			
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8	1/2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 40			
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1(1)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(1/2)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Light altering devices

	24144 0030 B VISOR 39 B		☐
--	--------------------------------	--	--------------------------

DELTALIGHT

SPM20 - SPY 392 AIR 92740

29813 9230 FG

Finish your product

	<u>24144 0010 B</u>	SPY 39 TUBE B	☐
	<u>24144 0010 FBR</u>	SPY 39 TUBE FBR	☐
	<u>24144 0010 FG</u>	SPY 39 TUBE FG	☐
	<u>24144 0010 GC</u>	SPY 39 TUBE GC	☐
	<u>24144 0010 W</u>	SPY 39 TUBE W	☐
	<u>24144 0070</u>	SPY 39 TUBE SBL	☐

Notes: