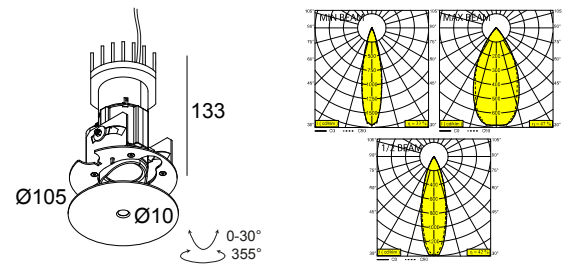




NIME TRIMLESS 927 PRIM

26411 9200 PRIM

AVAILABLE IN
PRIMER 26411 9200 PRIM



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	150
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 20°-50° EXCL.LED POWER SUPPLY 900mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC













Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-10,7W / CRI>90 (R9: 56) / 2700K / 385-814lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
LED TECHNICS (LIGHT SOURCE)	814lm // 10,7W // 76lm/W
LED TECHNICS (LUMINAIRE)	382lm // 12W // 31lm/W

Requirements	
MOUNTING KIT NIME O.F.A.	
LED POWER SUPPLY 350 / 500 / 700 / 900mA-DC DIM (Remote)	

For detailed installation instructions, please consult the manual: [26411_XXX0_HAND.pdf](#)










NIME TRIMLESS 927 PRIM
26411 9200 PRIM

CEILING COMPATIBILITY











Ceiling Type	Mounting Kit		
 System ceiling		MOUNTING KIT NIME O.F.A.	Required
 Plasterboard		MOUNTING KIT NIME O.F.A.	Required
 Stucanet		MOUNTING KIT NIME O.F.A.	Required
 Concrete + plaster		MOUNTING KIT NIME O.F.A.	Required
 Lintel + plaster		MOUNTING KIT NIME O.F.A.	Required
 Hollow-core slab + plaster		MOUNTING KIT NIME O.F.A.	Required

NIME TRIMLESS 927 PRIM
26411 9200 PRIM


FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->6(6) / 1->5(5) / 1->5(4) / 1 -> 5(3)	<input type="checkbox"/>
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->4(3) / 1->4(2) / 1->3(2) / 1->3(1)	<input type="checkbox"/>
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3->9(9) / 1->9(6) / 1->6(4)	<input type="checkbox"/>
	300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8	2 -> 2	<input type="checkbox"/>
	300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8	3 -> 4	<input type="checkbox"/>
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) / 3(2) / 3(2) / 2(1) / 1(1)	<input type="checkbox"/>
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	<input type="checkbox"/>
	21012 0010 LED POWER SUPPLY MULTI POWER	2->3 / 2->3 / 1->3	<input type="checkbox"/>
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	2->4 / 2->4 / 1->4	<input type="checkbox"/>

NIME TRIMLESS 927 PRIM
26411 9200 PRIM


	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	2->4 / 2->4 / 1->4 <input type="checkbox"/>
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->4 / 1->4 / 1->4 / 1->4 / 1->3 <input type="checkbox"/>
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	2->2 <input type="checkbox"/>
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	3->3 <input type="checkbox"/>
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	2->2 / 2->2 <input type="checkbox"/>
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	4->4 / 3->4 <input type="checkbox"/>
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1->3 / 1->3 / 1->3 / 1->2 / 1->1 <input type="checkbox"/>
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1->4(3) <input type="checkbox"/>
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	1->3(1) <input type="checkbox"/>
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1->4(2) <input type="checkbox"/>

NIME TRIMLESS 927 PRIM
26411 9200 PRIM




21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->3 ☐



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->3 ☐



21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

1->3 ☐

Mounting kits



26410 0010 MOUNTING KIT NIME O.F.A.

☐

Notes: