


MULTINOVA 30 TW 930 DIM5

27914 9005 GC

AVAILABLE IN
BLACK 27914 9005 B
GOLD COLOURED 27914 9005 GC
WHITE 27914 9005 W

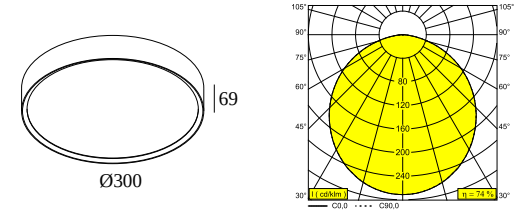

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed,Ceiling Surface mounted,Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.8
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PC SBL INCL.DIMMABLE LED POWER SUPPLY - DALI (DT8)
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	@ 2700K: LED cluster 9,4W / CRI>90 (R9: 63) / 2700K-6500K / 1338lm Or @ 6500K: LED cluster 9,4W / CRI>90 (R9: 81) / 2700K-6500K / 1428lm
SDCM	SDCM3
RISKGROUP	RG0
LM80	L70 > 60000
LED TECHNICS (LIGHT SOURCE)	@ 2700K: 1338lm // 9,4W // 142lm/W Or @ 6500K: 1428lm // 9,4W // 152lm/W
LED TECHNICS (LUMINAIRE)	@ 2700K: 993lm // 10,8W // 92lm/W Or @ 6500K: 1059lm // 10,8W // 98lm/W
Options	
MULTINOVA 30 SUSPENSION SET	
MULTINOVA 30 RECESSED KIT	

For detailed installation instructions, please consult the manual : [27914_XXX5_HAND.pdf](#)

MULTINOVA 30 TW 930 DIM5


27914 9005 GC

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Plasterboard	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Stucanet	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Concrete + plaster	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Lintel + plaster	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Hollow-core slab + plaster	 27910 0050 - MULTINOVA 30 RECESSED KIT Required

FINISH YOUR SPECIFICATION

Recessed kits




27910 0050 MULTINOVA 30 RECESSED KIT ☐



Cutout dimension (mm): 341

Suspension parts



27910 0020 B MULTINOVA 30 SUSPENSION SET 5x0,75 3m B ☐

27910 0020 W MULTINOVA 30 SUSPENSION SET 5x0,75 3m W ☐

Notes:

DELTALIGHT

MULTINOVA 30 TW 930 DIM5

27914 9005 GC