




ELBO SYMMETRIC P 60 930

223 26 93 A

AVAILABLE IN  
**ALU GREY** 223 26 93 A  
**BLACK** 223 26 93 B

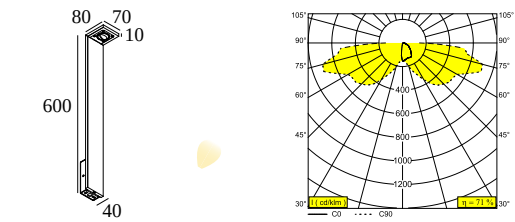

 [View on website](#)



| General info                |                                                   |
|-----------------------------|---------------------------------------------------|
| LOCATION                    | outdoor                                           |
| INSTALLATION                | Floor Surface mounted                             |
| INGRESS PROTECTION          | IP55                                              |
| WEIGHT (KG)                 | 1.4                                               |
| ADJUSTABILITY               | non adjustable                                    |
| INFORMATION                 | INCL.GLASS OPAL<br>INCL.LED POWER SUPPLY 350mA-DC |
| Electrical info             |                                                   |
| ELECTRICAL                  | 100-240V / 50-60Hz                                |
| CLASS                       | II                                                |
| POWER SUPPLY                | YES                                               |
| ENERGY CLASS                | F                                                 |
| CERTIFICATES                | CB, EAC, ENEC, RCM                                |
| Lightsource info            |                                                   |
| LIGHTSOURCE NAME            | LED                                               |
| LIGHTSOURCE                 | LED array 4,1W / CRI>90 / 3000K / 380lm           |
| SDCM                        | SDCM2                                             |
| RISKGROUP                   | RG2 (threshold 0,6m)                              |
| LED TECHNICS (LIGHT SOURCE) | 380lm // 4,1W // 95lm/W                           |
| LED TECHNICS (LUMINAIRE)    | 269lm // 4,7W // 57lm/W                           |
| Options                     |                                                   |

- PIN 11
- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P

For detailed installation instructions, please consult the manual : [223\\_26\\_83\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Waterproof connection parts



**216 12 00** CBOX

☐

Cutout dimension (mm): 142 x 142




**216 12 01** IP68 CONNECTION KIT

☐

**216 12 02** IP68 CONNECTOR 3P

☐

Pins and plates for bollards



**229 01 11** PIN 11

☐

Notes: