

DELTALIGHT

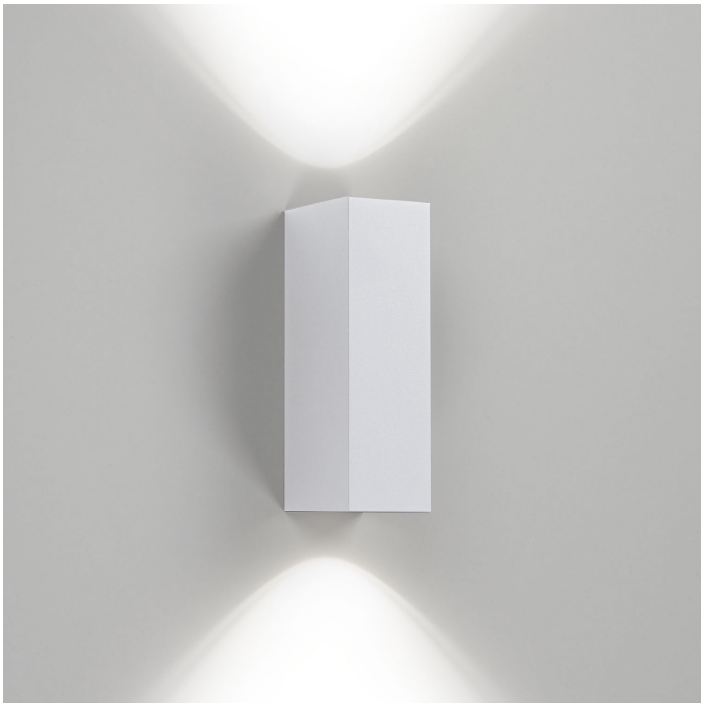


MONO II DOWN-UP LED 927

REFERENCE 223 53 812 920 W

AVAILABLE IN
ALU GREY 223 53 812 920 A
BLACK 223 53 812 920 B
FLEMISH BRONZE OUTDOOR 223 53 812 920 FBRX
ANTHRACITE 223 53 812 920 N
WHITE 223 53 812 920 W





View on website

General info	
LOCATION	outdoor
INSTALLATION	Wall Surface mounted
INGRESS PROTECTION	IP54
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	0.7
ADJUSTABILITY	non adjustable
INFORMATION	INCL.2 x LENS INCL.LED POWER SUPPLY 350 mA-DC

Electrical info	
ELECTRICAL	100-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm)
TM-30 VALUES	Rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1506lm // 11,6W // 129lm/W
LED TECHNICS (LUMINAIRE)	1225lm // 13,3W // 92lm/W

For detailed installation instructions, please consult the manual : **223_53_812_XXX_HAND.pdf**

DELTALIGHT

MONO II DOWN-UP LED 927

223 53 812 920 W

Notes: