




ENTERO RD-S IP TW 96520

28408 9020 B

AVAILABLE IN
BLACK 28408 9020 B
FULL WHITE 28408 9020 FW
GOLD COLOURED 28408 9020 GC

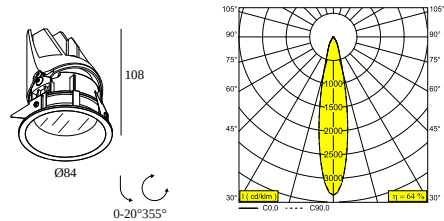

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 76
RECESSED DEPTH (MM)	115
THICKNESS OF MOUNTING SURFACE (MM)	max.16
INGRESS PROTECTION	IP44/20
WEIGHT (KG)	0.245
ADJUSTABILITY	0° to 20° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 500mA-DC TW - (DALI DT8)

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	692lm // 10,4W // 67lm/W

Requirements
LED POWER SUPPLY 500mA-DC TW

Options
ENTERO RD-S MOUNTING SET S2


For detailed installation instructions, please consult the manual : [28408_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Concrete + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Lintel + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Hollow-core slab	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Hollow-core slab + plaster	 28500 0190 - ENTERO RD-S MOUNTING SET S2 Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current


	21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5	2
	Dimtype: DALI	
	Cutout dimension (mm): 85	

DELTALIGHT


ENTERO RD-S IP TW 96520

28408 9020 B


Replaceable reflector / lens



19810 0180 SPY 52 REFLECTOR 20°

☐


19810 0190 SPY 52 REFLECTOR 45°

☐

19810 0240 SPY 52 REFLECTOR 30°

☐

Mounting set S2



28500 0190 ENTERO RD-S MOUNTING SET S2

☐

Notes: