



# FRAX



Light and ambiance is not only for indoors, by combining light and architecture in outdoor settings, the city also remains vibrant at night. With its 7 different light effects and its multiple installation options, Frax has been designed for every aspect of the urban architecture: any form, any material or any composition.

Specification	
Adjustability:	Adjustable 0-120° / 360°
Rating:	IP65

Performance	8°	14° / 26° / 47°
CRI:	90	
*Frax S SP:	5.9W	7.9W
*Frax M SP:	17.9W	23W

Delivered Lumens:	3000K			
Optic:	8°	14°	26°	47°
Frax S:	578Lm	668Lm	616Lm	590Lm
Frax S (Linear):		598Lm		
Frax S (Wallwash):		546Lm		
Frax S (Honeycomb):	533Lm	590Lm	486Lm	442Lm
Frax M:	1599Lm	1577Lm	1712Lm	1673Lm
Frax M (Linear):		1673Lm		
Frax M (Wallwash):		1577Lm		
Frax M (Honeycomb):	1413Lm	1506Lm	1338Lm	1219Lm

**Listing**

ETL certified to US and Canadian safety standards.

**Warranty**

5-year limited warranty.

**Ordering**

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: FRXS-SP08H30AX-A-JMINCND-120

Luminaire	Size	Power*	Optic	Accessories	CCT	Function	Finish	Installation	Application	Controls***		
FRX FRAX	<b>S<sup>(1)</sup></b> 117mm/ 4 <sup>5</sup> / <sub>8</sub> " diameter	<b>SP</b> Standard Power	<b>08<sup>(1)</sup></b> 8°	<b>X</b> No Accessory	<b>30</b> 3000K	<b>AX</b> Adjustable, Exterior Use	<b>A</b> Alu Grey	<b>JM</b> 4" junction box mount	<b>INC</b> Integral Power Supply	<b>D8-120</b> FE ELV dim 120V		
	<b>M</b> 153mm/ 6 <sup>1</sup> / <sub>32</sub> " diameter		<b>14</b> 14°	<b>H</b> HoneyComb							<b>N</b> Dark Grey	<b>ND-120<sup>(1)</sup></b> Non Dim 120V
			<b>26</b> 26°	<b>LV<sup>(2)</sup></b> Linear V							<b>N</b> Dark Grey	<b>BM</b> Bracket mount
			<b>47</b> 47°	<b>LH<sup>(2)</sup></b> Linear H								<b>PM</b> Pin mount
			<b>WW<sup>(2)</sup></b> Wallwash						<b>SM</b> Strap mount			

1 Size S Optic 08 only available with Controls ND-120; ND-120 only used for Size S Optic 08  
 2 Beam-altering accessories only available with Optic14  
 \*\*\* Contact factory for additional dimming options

**Related Products**


Kix, Logic, Logic Wallwash



**Finish Options - Frax S**


**FRAX S 8° - Installation JM**

**Installation BM, PM, SM**



**FRAX S 14° / 26° / 47° - No Accessory - Installation JM**

**Installation BM, PM, SM**

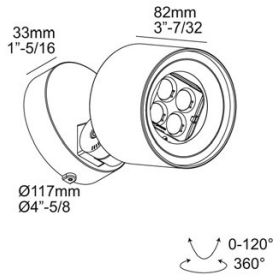

**FRAX S 14° - LH/LV/WW Accessories - Installation JM**

**Installation BM, PM, SM**



**FRAX S 14° / 26° / 47° - Honeycomb Accessory - Installation JM**

**Installation BM, PM, SM**



**BM - FRAX BRACKET**

**PM - FRAX PIN**

**SM - FRAX STRAP 3P**








**Finish Options - Frax M**



**FRAX M 8° - Installation JM**

**Installation BM,PM,SM**

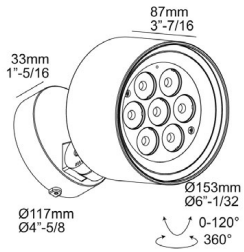

**FRAX M 14° / 26° / 47° - No Accessory - Installation JM**

**Installation BM, PM, SM**

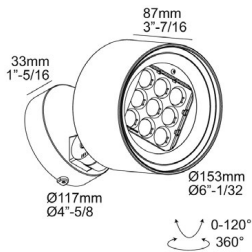

**FRAX M 14° - LH/LV/WW Accessories - Installation JM**

**Installation BM, PM, SM**




**FRAX M 14° / 26° / 47° - Honeycomb Accessory - Installation JM**


**Installation BM, PM, SM**




**Accessories**



FRAX KAP S  
26070 0010 N



FRAX KAP M  
26070 0020 N




ANTI VANDAL  
SCREWS (5 PCS)  
26070 0030




**Photometric Data**

**FRAX S**

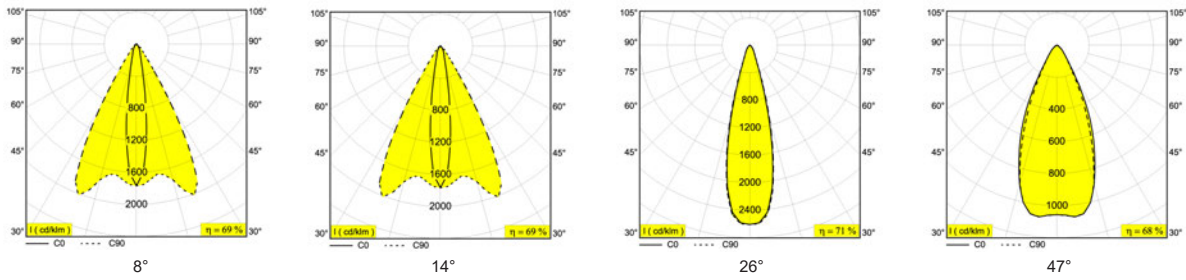

**FRAX M**

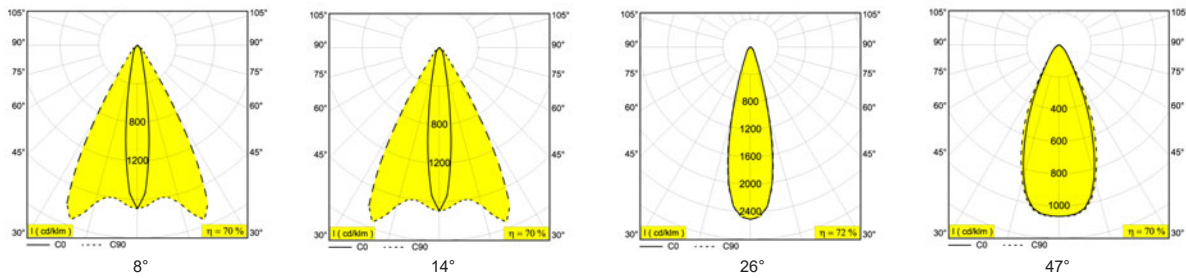

**Driver Options**

**D8 (For Size S)**

- Dimming Control Phase Control
- Dimming Range 10-100%
- Dim to off no
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥80
- THD @ Full Load <5%

**Dimmer Compatibility**

- Leviton IPE04-1LZ
- Lutron DVELV-300P

**D8 (For Size M)**

- Dimming Control Phase Control
- Dimming Range 1-100%
- Dim to off yes
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥90
- THD @ Full Load <20%

**Dimmer Compatibility**

- Leviton IP1106-1LZ / 6631-2
- Lutron DVELV-303P / MAELV-600

**ND**

- Dimming Control NON DIMMABLE
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥78
- THD @ Full Load <20%

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.