

SHIFTLINE 19 SPOTS



Compact in design, complete in functionality. Spy 20, 27, & 39 offer beautiful accent and task lighting options for the low profile Shiftline 19, with Spy 39 offering the highest output and multiple beamspread options.

Specification	Spy 20	Spy 27	Spy 39
LED Aperture	1/2"	1"	1 5/16"
Adjustability:	Adjustable 0-85° / 355°		
Rating:	IP20		

Performance	Spy 20	Spy 27	Spy 39
CRI / TM-30 (3000K):	90 / Rf: 92 / Rg: 99	90 / Rf: 90 / Rg: 99	
McAdam Step:	3	1	
LED Maintenance:	L90B10>120,000h	L90B10>50,000h	
*Standard Power:	2.3W	7W	10W

Delivered Lumens	3000K			
<i>**See page 4 for full details</i>	MS	MD	FC	WW
Spy 20 Short:		181		
Spy 20 Long:		181		
Spy 27 Short:		480		
Spy 27 Long:		288		
Spy 39 Short:	888	883	303	431
Spy 39 Long:	683	737		

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: SPY20S-SP35SPA-GC-SL-MDL

Luminaire	Size	Length	Power*	CCT	Optic**	Function	Finish	Inner Finish ⁴	Application ⁵	Controls
SPY SPY	20 20mm / 25/32"	S Short	SP Standard Power	27 2700K	MD Medium Spot 30°	A Adjustable	B Black	B Black	SL Shiftline 19	MDL 0-10V dim via Modulator
	27 27mm / 1 1/16"	L Long		30 3000K			FBR Flemish Bronze	BV ² Black Visor		
				35 3500K			FG Flemish Gold	FBR ³ Flemish Bronze		
	39 39mm / 1 17/32"	S Short	SP Standard Power	27 2700K	MS Medium Narrow Spot 20°		GC Gold Colored	FG ³ Flemish Gold		D5 Dali dim
		L Long		30 3000K			W White	GC ³ Gold Colored		
				35 3500K	MD Medium Spot 40°			W ³ White		
					FC ^{1,4} Field Adjustable 15-45°					WD Wireless Casambi dim
					WW ^{1,4} Wallwash					

¹ Only applies to Length S.

² Only applies to Length S, Size 27 or 39.

³ Only applies to Size 39.

⁴ No Inner Finish needed for Optic FC or WW; skip field.

⁵ Profile system hardware specified separately.

Related Products

Spy 27, Spy 39


DELTALIGHT

www.deltalight.com




Finish Options


SPY 20 SHORT




SPY 20 LONG



SPY 20 INNER FINISH






SPY 27 SHORT




SPY 27 INNER FINISH

SPY 27 INNER FINISH - LENGTH S ONLY





SPY 27 LONG




DELTALIGHT

Finish Options


SPY 39 SHORT




BLACK



FLEMISH BRONZE



FLEMISH GOLD




GOLD COLORED



WHITE

SPY 39 INNER FINISH - LENGTH SHORT ONLY



BLACK



BLACK VISOR 39



FLEMISH BRONZE



FLEMISH GOLD




GOLD COLORED



WHITE

BLACK VISOR 39
INSTALLED

SPY 39 SHORT FOCUS



BLACK



FLEMISH BRONZE



FLEMISH GOLD




GOLD COLORED



WHITE

SPY 39 SHORT WALLWASH



BLACK



FLEMISH BRONZE



FLEMISH GOLD




GOLD COLORED



WHITE

SPY 39 LONG



BLACK



FLEMISH BRONZE



FLEMISH GOLD




GOLD COLORED




WHITE


SPY 39 INNER FINISH - LENGTH LONG ONLY




BLACK



FLEMISH BRONZE



FLEMISH GOLD



GOLD COLORED



WHITE


DELTALIGHT

Photometric Data

Delivered Lumens	2700K				3000K				3500K			
**Optic:	MS	MD	FC	WW	MS	MD	FC	WW	MS	MD	FC	WW
Spy 20 S:		166				181				189		
Spy 20 L:		166				181				189		
Spy 27 S:		459				480				498		
Spy 27 L:		276				288				299		
Spy 39 S:	849	844	290	413	888	883	303	431	920	914	314	447
Spy 39 L:	652	705			683	737			707	764		


SPY 20 SHORT

SPY 20 LONG

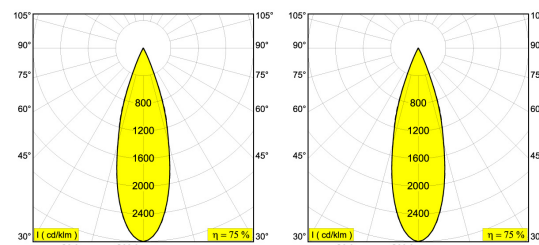


SPY 27 SHORT

SPY 27 LONG


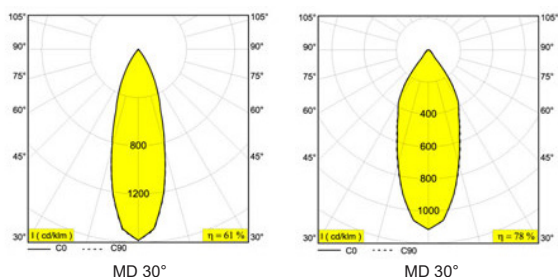


SPY 39 SHORT

SPY 39 SHORT WALLWASH

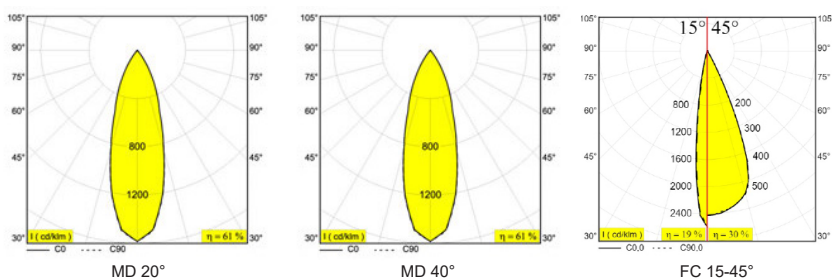

SPY 39 LONG

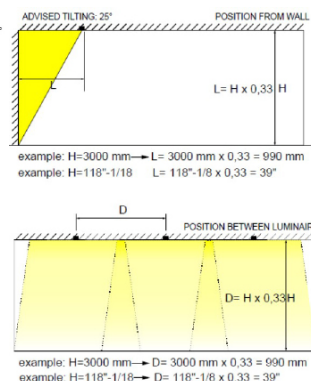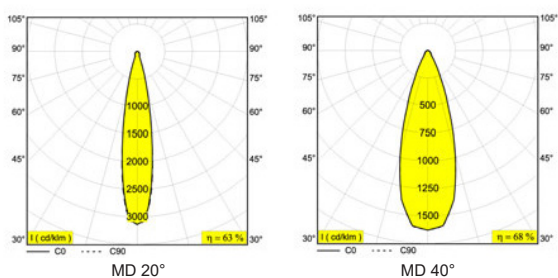

Installation Options

Delta Light's Shiftline 19 utilizes 48V remote power supplies. With a maximum of 96W per power supply, the below details maximum modules per power feed.

Maximum Capacity per Remote Power Supply	Spy 20 SL	Spy 27 SL	Spy 39 SL
*Standard Power:	34	12	8

FOR SYSTEM HARDWARE, REFER TO THE FOLLOWING PROFILE SYSTEMS:

Shiftline 19

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.

DELTALIGHT