

## LOGIC LINEAR ON 880 HONEYCOMB 92725 DIM5

30836 9225 A

AVAILABLE IN




**ALU GREY** 30836 9225 A

**BLACK** 30836 9225 B

**FLEMISH BRONZE OUTDOOR** 30836 9225 FBRX

**ANTHRACITE** 30836 9225 N

**WHITE** 30836 9225 W

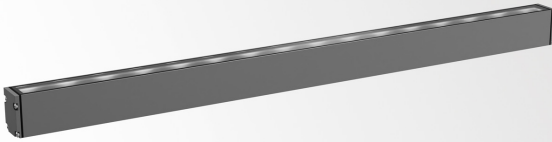

 [View on website](#)



### General info

<b>LOCATION</b>	outdoor
<b>INSTALLATION</b>	Floor Surface mounted, Wall Surface mounted
<b>INGRESS PROTECTION</b>	IP67
<b>PROTECTION AGAINST MECHANICAL IMPACT</b>	IK07
<b>WEIGHT (KG)</b>	2
<b>INFORMATION</b>	16 x LENS FL-25° INCL.HONEYCOMB EXCL.LED POWER SUPPLY 48V-DC DALI DT8 dimming

### Electrical info

<b>ELECTRICAL</b>	48V-DC
<b>CLASS</b>	III
<b>DIM TYPE</b>	DALI
<b>ENERGY CLASS</b>	F
<b>CERTIFICATES</b>	CB, ENEC

### Lightsource info

<b>LIGHTSOURCE NAME</b>	LED
<b>LIGHTSOURCE</b>	LED cluster 28,8W / CRI>90 (R9: 55) / 2700K / 3288lm
<b>TM-30 VALUES</b>	Rf: 91 / Rg: 100
<b>SDCM</b>	SDCM3
<b>RISKGROUP</b>	RG2
<b>LM80</b>	L80 > 150000
<b>BEAMANGLE</b>	25°
<b>LED TECHNICS (LIGHT SOURCE)</b>	3288lm // 28,8W // 111lm/W
<b>LED TECHNICS (LUMINAIRE)</b>	1916lm // 33,1W // 58lm/W

### Requirements

WALL BRACKET SET  
FLOOR BRACKET SET  
IP68 CABLE + CONNECTOR 5P  
LED POWER SUPPLY 48V-DC

### Options

THROUGH WIRING SET IP68

# DELTALIGHT

## LOGIC LINEAR ON 880 HONEYCOMB 92725 DIM5


30836 9225 A

For detailed installation instructions, please consult the manual : [30836\\_XXX5\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION

#### LED power supplies

#### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**21032 0390** LED POWER SUPPLY 48V-DC / 90W

2

**Dimtype: non-dimmable**

**Cutout dimension (mm): 75**

#### Fixation components



**30810 0040** LOGIC LINEAR 880 BOX EXTEND

**30810 0040 INOX** WALL BRACKET SET 60 INOX

**30810 0040 N** WALL BRACKET SET 60 N



**30810 0050 INOX** WALL BRACKET SET 100 INOX

**30810 0050 N** WALL BRACKET SET 100 N



**30810 0060 INOX** WALL BRACKET SET 200 INOX

**30810 0060 N** WALL BRACKET SET 200 N

# DELTALIGHT

## LOGIC LINEAR ON 880 HONEYCOMB 92725 DIM5

30836 9225 A



**30810 0070 INOX** FLOOR BRACKET SET INOX



### Electric connection parts



**30810 0080** IP68 CABLE + CONNECTOR 5P - 0,5m



**30810 0090** IP68 CABLE + CONNECTOR 5P - 2m



**30810 0110** THROUGH WIRING SET IP68 880



Notes: