

LOGIC LINEAR ON 880 92740 DIM5

30835 9235 FBRX

AVAILABLE IN




ALU GREY 30835 9235 A

BLACK 30835 9235 B

FLEMISH BRONZE OUTDOOR 30835 9235 FBRX

ANTHRACITE 30835 9235 N

WHITE 30835 9235 W

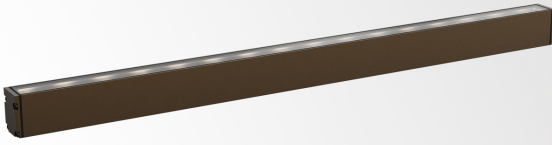

 [View on website](#)



General info

| | |
|---|---|
| LOCATION | outdoor |
| INSTALLATION | Floor Surface mounted, Wall Surface mounted |
| INGRESS PROTECTION | IP67 |
| PROTECTION AGAINST MECHANICAL IMPACT | IK07 |
| WEIGHT (KG) | 2 |
| INFORMATION | 16 x LENS WFL-40° EXCL.LED POWER SUPPLY 48V-DC DALI DT8 dimming |

Electrical info

| | |
|---------------------|----------|
| ELECTRICAL | 48V-DC |
| CLASS | III |
| DIM TYPE | DALI |
| ENERGY CLASS | F |
| CERTIFICATES | CB, ENEC |

Lightsource info

| | |
|------------------------------------|--|
| LIGHTSOURCE NAME | LED |
| LIGHTSOURCE | LED cluster 28,8W / CRI>90 (R9: 55) / 2700K / 3288lm |
| TM-30 VALUES | Rf: 91 / Rg: 100 |
| SDCM | SDCM3 |
| RISKGROUP | RG2 |
| LM80 | L80 > 150000 |
| BEAMANGLE | 40° |
| LED TECHNICS (LIGHT SOURCE) | 3288lm // 28,8W // 111lm/W |
| LED TECHNICS (LUMINAIRE) | 2502lm // 33,1W // 76lm/W |

Requirements

WALL BRACKET SET
FLOOR BRACKET SET
IP68 CABLE + CONNECTOR 5P
LED POWER SUPPLY 48V-DC

Options

THROUGH WIRING SET IP68

DELTALIGHT

LOGIC LINEAR ON 880 92740 DIM5

30835 9235 FBRX

For detailed installation instructions, please consult the manual : [30835_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0390 LED POWER SUPPLY 48V-DC / 90W

Dimtype: non-dimmable

Cutout dimension (mm): 75

2

Fixation components



30810 0040 LOGIC LINEAR 880 BOX EXTEND


30810 0040 INOX WALL BRACKET SET 60 INOX

30810 0040 N WALL BRACKET SET 60 N



30810 0050 INOX WALL BRACKET SET 100 INOX

30810 0050 N WALL BRACKET SET 100 N



30810 0060 INOX WALL BRACKET SET 200 INOX

30810 0060 N WALL BRACKET SET 200 N

DELTALIGHT

LOGIC LINEAR ON 880 92740 DIM5

30835 9235 FBRX



30810 0070 INOX FLOOR BRACKET SET INOX



Electric connection parts



30810 0080 IP68 CABLE + CONNECTOR 5P - 0,5m



30810 0090 IP68 CABLE + CONNECTOR 5P - 2m



30810 0110 THROUGH WIRING SET IP68 880



Notes: