


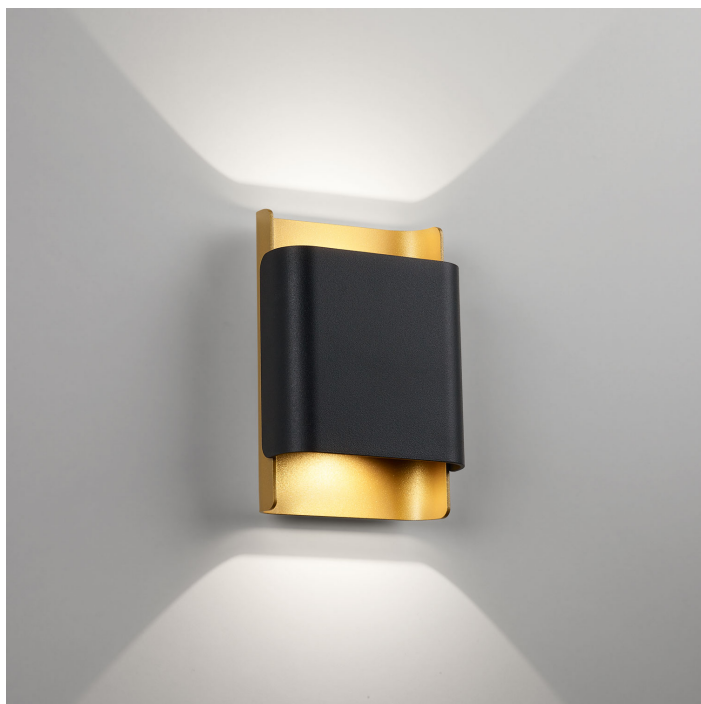



WANT-IT S 930 DIM8

275 12 82 93 ED8 B-FG

AVAILABLE IN

BLACK-FLEMISH GOLD 275 12 82 93 ED8 B-FG

WHITE-WHITE 275 12 82 93 ED8 W-W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Wall Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	non adjustable
INFORMATION	INCL.DIMMABLE LED POWER SUPPLY 350mA-DC

Electrical info

ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, LCA, RCM

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 3,2W / CRI>90 (R9: 52) / 3000K / 309lm)
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	618lm // 6,4W // 98lm/W
LED TECHNICS (LUMINAIRE)	275lm // 7,4W // 37lm/W

For detailed installation instructions, please consult the manual : [275_12_82_XX_ED8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Miscellaneous control equipment



300 90 004 ED8 WIRELESS CONTROL DIM8



Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 40

Notes: