




HEDRA 39 W 60 DOWN-UP 92713

22534 9210 BBR-B

AVAILABLE IN
BLACK BRONZE-BLACK 22534 9210 BBR-B
GOLD COLORED-BLACK 22534 9210 GC-B
WHITE-WHITE 22534 9210 W-W

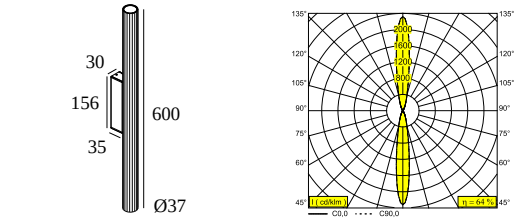

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Wall Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.9
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR SP-13° INCL.LED POWER SUPPLY 350mA-DC
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	E
CERTIFICATES	LCA, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 3,9W / CRI>90 (R9: 56) / 2700K / 385lm)
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	13°
LED TECHNICS (LIGHT SOURCE)	770lm // 7,8W // 98lm/W
LED TECHNICS (LUMINAIRE)	495lm // 9W // 55lm/W

For detailed installation instructions, please consult the manual : [22534_XXX0_HAND.pdf](#)

Notes:

DELTALIGHT

HEDRA 39 W 60 DOWN-UP 92713

22534 9210 BBR-B