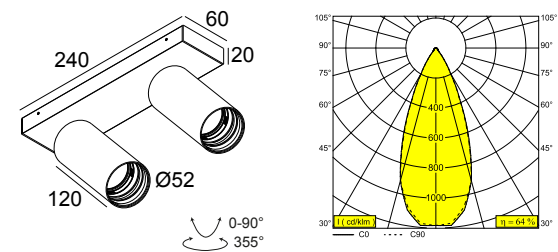




SPY 52 ON 2 92745 DIM8 B-B
19827 9238 B-B

AVAILABLE IN
BLACK-BLACK 19827 9238 B-B
WHITE-WHITE 19827 9238 W-W



 [View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	2 x REFLECTOR WFL-45° INCL.DIMMABLE LED POWER SUPPLY 350/500mA-DC Current selection via jumper on power supply Optional REFLECTORS 20° & 30° available

Electrical info

ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	D
CERTIFICATES	RCM

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	@500mA: 2 x (LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm) Or @350mA: 2 x (LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm)
TM-30 VALUES	@500mA: rf: 89 / Rg: 100 @350mA: rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	@500mA: 2082lm // 17,2W // 121lm/W Or @350mA: 1506lm // 11,6W // 129lm/W
LED TECHNICS (LUMINAIRE)	@500mA: 1332lm // 20W // 67lm/W Or @350mA: 964lm // 13W // 72lm/W

Requirements

SPY 52 TUBE

SPY 52 ON 2 92745 DIM8 B-B

19827 9238 B-B

Accessories

HONEYCOMB 42

SPREAD LENS 42

LINEAR SPREAD LENS 42

SOFTENING LENS 42

GLASS SBL 42







For detailed installation instructions, please consult the manual: [19827_XXX8_HAND.pdf](#)

SPY 52 ON 2 92745 DIM8 B-B

19827 9238 B-B

FINISH YOUR SPECIFICATION


Light altering devices

	19810 0010 B HONEYCOMB 42 SINGLE USE B	<input type="checkbox"/>
	19810 0020 LINEAR SPREAD LENS 42	<input type="checkbox"/>
	19810 0030 SPREAD LENS 42	<input type="checkbox"/>
	19810 0040 SOFTENING LENS 42	<input type="checkbox"/>
	19810 0050 GLASS SBL 42	<input type="checkbox"/>
	19810 0060 B HONEYCOMB 42 DOUBLE USE B	<input type="checkbox"/>




SPY 52 ON 2 92745 DIM8 B-B

19827 9238 B-B

Finish your product

 <div><div>40</div><div>19810 0100 B</div><div>SPY 52 TUBE B</div></div>	<input type="checkbox"/>
<div><div>19810 0100 FBR</div><div>SPY 52 TUBE FBR</div></div>	<input type="checkbox"/>
<div><div>19810 0100 FG</div><div>SPY 52 TUBE FG</div></div>	<input type="checkbox"/>
<div><div>19810 0100 GC</div><div>SPY 52 TUBE GC</div></div>	<input type="checkbox"/>
<div><div>19810 0100 W</div><div>SPY 52 TUBE W</div></div>	<input type="checkbox"/>

Replaceable reflector / lens

 <div><div>18</div><div>19810 0180</div><div>SPY 52 REFLECTOR 20°</div></div>	<input type="checkbox"/>
 <div><div>18</div><div>19810 0190</div><div>SPY 52 REFLECTOR 45°</div></div>	<input type="checkbox"/>
 <div><div>18</div><div>19810 0240</div><div>SPY 52 REFLECTOR 30°</div></div>	<input type="checkbox"/>

Notes: